
# K-DBV MANO 1/2"

Pressure limiting valves size 1/2

## Özellikler

| | |
|---|---|
| **Model** | Spring-loaded, non-return diaphragm valve with adjustable opening pressure |
| **Akışkan sıcaklığı** | max. 60 °C |
| **Ortam sıcaklığı** | Max. 60 °C |
| **Yalıtım malzemesi** | NBR |
| **Yay kapağı** | POM/brass |
| **Gövde** | Die-cast zinc, painted silver |
| **Membran** | NBR |



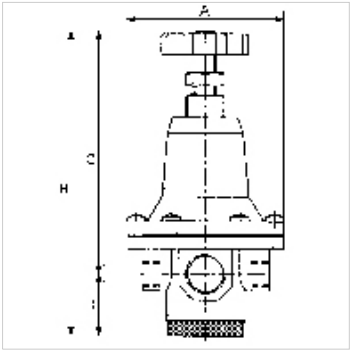

## Açıklama

Diğer bilgiler, istek üzerinedir.

## Açıklama

Manually adjustable overflow valves.For protecting pneumatic systems against damage caused by excess pressure.

## Ürün

| Tanım | Mil | Ayar aralığı | A (mm) | B | C (mm) | TR (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 01 97** | G 1/2 | 0.5 - 3.0 bar | 82,0 | 162,0 mm | 129,0 | 33,0 |
| **K- 07 25 01 98** | G 1/2 | 0.5 - 5.5 bar | 82,0 | 162,0 mm | 129,0 | 33,0 |
| **K- 07 25 01 99** | G 1/2 | 0.5 - 10.0 bar | 82,0 | 162,0 mm | 129,0 | 33,0 |

## Yedek Parçalar

| | |
|---|---|
| **K-HALTERBAUSATZ STANDARD** | Holder |
| **K-GERAETESTECKER** | Coupling socket |
| **K-SCHALLDAE SINTERBR AG 569** | Silencers, sintered bronze, flat type with male thread, 569 Series |
| **K-VERSCHLEI-SATZ** | Set of wearing parts |
| **K-KM MS** | Hexagonal lock nuts, brass |

*Titiz kontrole rağmen hatalar önlenemez ve sorumluluk altında bırakmayan bilgiler hakkında hiçbir sorumluluk kabul edilmez.*