


属性

| | |
|--------|----------------|
| 接口 1 | 米制外螺纹,圆柱形 |
| 密封形式 1 | 24°内锥 |
| 接口 2 | 米制外螺纹,圆柱形 |
| 密封形式 2 | 24°内锥 |
| 结构类型 | 旋转螺栓连接 |
| 结构类型补充 | 滚珠轴承 |
| 结构形式 | 直道 |
| 供货范围 | 接管(不带锁紧螺母和切割环) |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

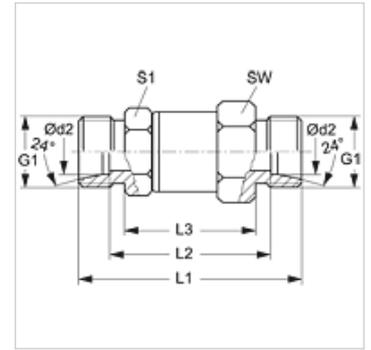

提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

货品

| 名称 | 结构系列 | 工作压力 巴 | Ø d2 (mm) | G1 | L1 (mm) | L2 (mm) | L3 (mm) | SW (mm) | S1 |
|---------------|------|--------|-----------|------------|---------|---------|---------|---------|----|
| DG NW 04 HL | L | PN 315 | 6 | M 12 x 1.5 | 57,0 | 43,0 | 37,0 | 22 | 19 |
| DG NW 06 HL | L | PN 315 | 8 | M 14 x 1.5 | 57,0 | 43,0 | 37,0 | 22 | 19 |
| DG NW 08 HL | L | PN 315 | 10 | M 16 x 1.5 | 68,0 | 54,0 | 46,0 | 30 | 24 |
| DG NW 10 HL | L | PN 315 | 12 | M 18 x 1.5 | 68,0 | 54,0 | 46,0 | 30 | 24 |
| DG NW 13 HL | L | PN 315 | 15 | M 22 x 1.5 | 70,0 | 56,0 | 46,0 | 30 | 24 |
| DG NW 16 HL | L | PN 315 | 18 | M 26 x 1.5 | 80,5 | 65,5 | 56,5 | 41 | 36 |
| DG NW 20 HL | L | PN 160 | 22 | M 30 x 2 | 84,5 | 69,5 | 56,5 | 41 | 36 |
| DG NW 25 HL | L | PN 160 | 28 | M 36 x 2 | 96,5 | 81,5 | 68,5 | 60 | 55 |
| DG NW 32 HL | L | PN 160 | 35 | M 45 x 2 | 100,5 | 79,5 | 68,5 | 60 | 55 |
| DG NW 03 HS H | S | PN 500 | 6 | M 14 x 1.5 | 61,0 | 47,0 | 37,0 | 22 | 19 |
| DG NW 04 HS H | S | PN 500 | 8 | M 16 x 1.5 | 61,0 | 47,0 | 37,0 | 22 | 19 |
| DG NW 06 HS H | S | PN 500 | 10 | M 18 x 1.5 | 61,0 | 55,0 | 37,0 | 30 | 24 |
| DG NW 08 HS H | S | PN 500 | 12 | M 20 x 1.5 | 72,0 | 57,0 | 48,0 | 30 | 24 |
| DG NW 10 HS H | S | PN 500 | 14 | M 22 x 1.5 | 73,0 | 57,0 | 45,0 | 30 | 24 |
| DG NW 13 HS H | S | PN 400 | 16 | M 24 x 1.5 | 74,0 | 57,0 | 46,0 | 30 | 24 |
| DG NW 16 HS H | S | PN 400 | 20 | M 30 x 2 | 92,0 | 71,0 | 60,0 | 41 | 36 |
| DG NW 20 HS H | S | PN 400 | 25 | M 36 x 2 | 98,0 | 72,0 | 62,0 | 41 | 36 |
| DG NW 25 HS H | S | PN 400 | 30 | M 42 x 2 | 109,0 | 82,0 | 69,0 | 60 | 55 |
| DG NW 32 HS H | S | PN 315 | 38 | M 52 x 2 | 114,0 | 82,0 | 70,0 | 60 | 55 |

结构系列:LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø d2 = 管外直径