


### 属性

|        |              |
|--------|--------------|
| 接口 1   | NPT内螺纹       |
| 密封形式 1 | 螺纹密封式        |
| 接口 2   | 米制外螺纹,圆柱形    |
| 密封形式 2 | 24°内锥        |
| 结构类型   | 旋上式螺栓连接      |
| 结构形式   | 直道           |
| 供货范围   | 带锁紧螺母和切割环的接套 |
| 原料     | 不锈钢          |

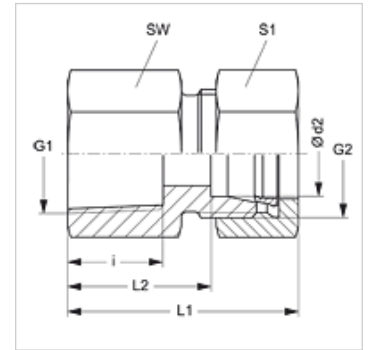

### 提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

### 货品

| 名称                  | 结构系列 | 工作压力 巴 | Ø d2 (mm) | G1               | G2         | i (mm) | L1 (mm) | L2 (mm) | SW (mm) | S1 |
|---------------------|------|--------|-----------|------------------|------------|--------|---------|---------|---------|----|
| GAN NW 04 HL VA     | L    | PN 315 | 6         | 1/8" -27 NPT     | M 12 x 1.5 | 11,6   | 34,0    | 19,0    | 14      | 14 |
| GAN NW 04 HL 1/4 VA | L    | PN 315 | 6         | 1/4" -18 NPT     | M 12 x 1.5 | 16,4   | 38,0    | 23,5    | 19      | 14 |
| GAN NW 06 HL VA     | L    | PN 315 | 8         | 1/4" -18 NPT     | M 14 x 1.5 | 16,4   | 38,0    | 23,5    | 19      | 17 |
| GAN NW 08 HL VA     | L    | PN 315 | 10        | 1/4" -18 NPT     | M 16 x 1.5 | 16,4   | 39,0    | 24,0    | 19      | 19 |
| GAN NW 08 HL 1/2 VA | L    | PN 315 | 10        | 1/2" -14 NPT     | M 16 x 1.5 | 22,6   | 38,0    | 26,0    | 27      | 19 |
| GAN NW 10 HL 1/4 VA | L    | PN 315 | 12        | 1/4" -18 NPT     | M 18 x 1.5 | 16,4   | 43,0    | 23,5    | 19      | 19 |
| GAN NW 10 HL VA     | L    | PN 315 | 12        | 3/8" -18 NPT     | M 18 x 1.5 | 17,4   | 42,0    | 27,0    | 24      | 22 |
| GAN NW 10 HL 1/2 VA | L    | PN 315 | 12        | 1/2" -14 NPT     | M 18 x 1.5 | 22,6   | 47,0    | 32,0    | 27      | 22 |
| GAN NW 13 HL VA     | L    | PN 315 | 15        | 1/2" -14 NPT     | M 22 x 1.5 | 22,6   | 48,0    | 33,0    | 27      | 27 |
| GAN NW 16 HL VA     | L    | PN 315 | 18        | 1/2" -14 NPT     | M 26 x 1.5 | 22,6   | 49,0    | 32,5    | 27      | 32 |
| GAN NW 20 HL VA     | L    | PN 160 | 22        | 3/4" -14 NPT     | M 30 x 2   | 23,1   | 52,0    | 35,5    | 36      | 36 |
| GAN NW 25 HL VA     | L    | PN 160 | 28        | 1" -11.5 NPT     | M 36 x 2   | 27,8   | 57,0    | 40,5    | 41      | 41 |
| GAN NW 32 HL VA     | L    | PN 160 | 35        | 1.1/4" -11.5 NPT | M 45 x 2   | 28,3   | 62,0    | 40,5    | 55      | 50 |
| GAN NW 40 HL VA     | L    | PN 160 | 42        | 1.1/2" -11.5 NPT | M 52 x 2   | 28,3   | 65,0    | 42,0    | 60      | 60 |
| GAN NW 03 HS VA     | S    | PN 630 | 6         | 1/4" -18 NPT     | M 14 x 1.5 | 16,4   | 41,0    | 26,0    | 19      | 17 |
| GAN NW 04 HS VA     | S    | PN 630 | 8         | 1/4" -18 NPT     | M 16 x 1.5 | 16,4   | 41,0    | 26,0    | 19      | 19 |
| GAN NW 06 HS VA     | S    | PN 630 | 10        | 3/8" -18 NPT     | M 18 x 1.5 | 17,4   | 44,0    | 27,0    | 24      | 22 |
| GAN NW 08 HS VA     | S    | PN 630 | 12        | 3/8" -18 NPT     | M 20 x 1.5 | 17,4   | 44,0    | 27,5    | 24      | 24 |
| GAN NW 08 HS 1/2 VA | S    | PN 630 | 12        | 1/2" -14 NPT     | M 20 x 1.5 | 22,6   | 50,0    | 33,5    | 27      | 24 |
| GAN NW 10 HS VA     | S    | PN 630 | 14        | 1/2" -14 NPT     | M 22 x 1.5 | 22,6   | 53,0    | 35,0    | 27      | 27 |
| GAN NW 13 HS VA     | S    | PN 400 | 16        | 1/2" -14 NPT     | M 24 x 1.5 | 22,6   | 50,0    | 34,5    | 27      | 30 |
| GAN NW 16 HS VA     | S    | PN 400 | 20        | 3/4" -14 NPT     | M 30 x 2   | 23,1   | 57,0    | 35,5    | 32      | 36 |
| GAN NW 20 HS VA     | S    | PN 400 | 25        | 1" -11.5 NPT     | M 36 x 2   | 27,8   | 65,0    | 41,0    | 41      | 46 |
| GAN NW 25 HS VA     | S    | PN 400 | 30        | 1.1/4" -11.5 NPT | M 42 x 2   | 28,3   | 70,0    | 43,5    | 55      | 50 |
| GAN NW 32 HS VA     | S    | PN 315 | 38        | 1.1/2" -11.5 NPT | M 52 x 2   | 28,3   | 74,0    | 43,0    | 60      | 60 |

结构系列:LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø d2 = 管外径

### 产品变体

**XGAN VA** 旋上式螺栓连接, 接套(不带锁紧螺母和切割环)