


### 属性

|            |                |
|------------|----------------|
| 接口 1       | NPT外螺纹         |
| 密封形式 1     | 螺纹密封式          |
| 接口 2 + 3   | 米制外螺纹, 圆柱形     |
| 密封形式 2 + 3 | 24°内锥          |
| 结构类型       | 旋入式螺栓连接        |
| 结构形式       | T形             |
| 标准         | DIN 2353       |
| 供货范围       | 接套(不带锁紧螺母和切割环) |
| 原料         | 钢              |
| 表面保护       | 电镀涂层           |

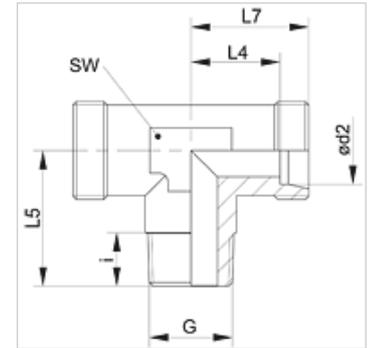

### 提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

### 货品

| 名称               | 结构系列 | 工作压力 巴 | Ø d2 (mm) | G                | i (mm) | L4 (mm) | L5 (mm) | L7 (mm) | SW (mm) |
|------------------|------|--------|-----------|------------------|--------|---------|---------|---------|---------|
| XTN 04 LL        | LL   | PN 100 | 4         | 1/8" -27 NPT     | 8      | 11,0    | 17      | 15      | 9       |
| XTN 05 LL        | LL   | PN 100 | 5         | 1/8" -27 NPT     | 8      | 9,5     | 17      | 15      | 9       |
| XTN 06 LL        | LL   | PN 100 | 6         | 1/8" -27 NPT     | 8      | 9,5     | 17      | 15      | 9       |
| XTN 08 LL        | LL   | PN 100 | 8         | 1/8" -27 NPT     | 8      | 11,5    | 20      | 17      | 12      |
| XTN NW 04 HL     | L    | PN 315 | 6         | 1/8" -27 NPT     | 8      | 12,0    | 20      | 19      | 12      |
| XTN NW 04 HL 1/4 | L    | PN 315 | 6         | 1/4" -18 NPT     | 12     | 12,0    | 25      | 19      | 12      |
| XTN NW 06 HL     | L    | PN 315 | 8         | 1/4" -18 NPT     | 12     | 14,0    | 26      | 21      | 12      |
| XTN NW 08 HL     | L    | PN 315 | 10        | 1/4" -18 NPT     | 12     | 15,0    | 27      | 22      | 14      |
| XTN NW 10 HL     | L    | PN 315 | 12        | 3/8" -18 NPT     | 12     | 17,0    | 28      | 24      | 17      |
| XTN NW 13 HL     | L    | PN 315 | 15        | 1/2" -14 NPT     | 14     | 21,0    | 34      | 26      | 19      |
| XTN NW 16 HL     | L    | PN 315 | 18        | 1/2" -14 NPT     | 14     | 23,5    | 36      | 31      | 24      |
| XTN NW 20 HL     | L    | PN 160 | 22        | 3/4" -14 NPT     | 16     | 27,5    | 42      | 35      | 27      |
| XTN NW 25 HL     | L    | PN 160 | 28        | 1" -11.5 NPT     | 18     | 30,5    | 48      | 38      | 36      |
| XTN NW 32 HL     | L    | PN 160 | 35        | 1.1/4" -11.5 NPT | 20     | 34,5    | 54      | 45      | 41      |
| XTN NW 40 HL     | L    | PN 160 | 42        | 1.1/2" -11.5 NPT | 22     | 40,0    | 61      | 51      | 50      |
| XTN NW 03 HS     | S    | PN 630 | 6         | 1/4" -18 NPT     | 12     | 16,0    | 26      | 23      | 12      |
| XTN NW 04 HS     | S    | PN 630 | 8         | 1/4" -18 NPT     | 12     | 17,0    | 27      | 24      | 14      |
| XTN NW 06 HS     | S    | PN 630 | 10        | 3/8" -18 NPT     | 12     | 17,5    | 28      | 35      | 17      |
| XTN NW 08 HS     | S    | PN 630 | 12        | 3/8" -18 NPT     | 12     | 21,5    | 31      | 30      | 17      |
| XTN NW 10 HS     | S    | PN 630 | 14        | 1/2" -14 NPT     | 14     | 22,0    | 32      | 30      | 19      |
| XTN NW 13 HS     | S    | PN 400 | 16        | 1/2" -14 NPT     | 14     | 24,5    | 32      | 33      | 24      |
| XTN NW 16 HS     | S    | PN 400 | 20        | 3/4" -14 NPT     | 16     | 26,5    | 42      | 37      | 27      |
| XTN NW 20 HS     | S    | PN 400 | 25        | 1" -11.5 NPT     | 18     | 30,0    | 48      | 42      | 36      |
| XTN NW 25 HS     | S    | PN 400 | 30        | 1.1/4" -11.5 NPT | 20     | 35,5    | 54      | 49      | 41      |
| XTN NW 32 HS     | S    | PN 315 | 38        | 1.1/2" -11.5 NPT | 22     | 41,0    | 61      | 57      | 50      |

结构系列: LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø = 管外直径

### 产品变体

|        |                  |
|--------|------------------|
| XTN VA | 旋入式螺栓连接, T形, 不锈钢 |
| TN     | 旋入式螺栓连接, T形, 钢   |