


属性

| | |
|--------|------------------------|
| 接口 1 | 米制外螺纹,圆锥形 |
| 密封形式 1 | 螺纹密封式 |
| 接口 2 | 米制外螺纹,圆柱形 |
| 密封形式 2 | 24°内锥 |
| 结构类型 | 旋入式螺栓连接 |
| 结构形式 | 直道 |
| 标准 | DIN 2353 ISO 8434-1 |
| 供货范围 | 带锁紧螺母和切割环的接套 |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

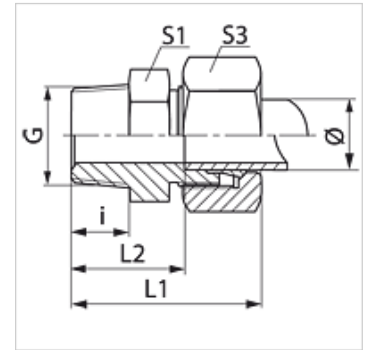

提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

货品

| 名称 | 结构系列 | 工作压力 巴 | 管外径 Ø (mm) | G | i (mm) | L1 (mm) | L2 (mm) | S1 | S3 |
|--------------|------|--------|------------|--------------|--------|---------|---------|----|----|
| VM 04 LL | LL | PN 100 | 4 | M 8 x 1 K | 8 | 26,0 | 16,0 | 11 | 10 |
| VM 04 LL 10 | LL | PN 100 | 4 | M 10 x 1 K | 8 | 26,0 | 16,0 | 11 | 10 |
| VM 04 LL 6 | LL | PN 100 | 4 | M 6 x 1 K | 8 | 27,0 | 16,0 | 10 | 10 |
| VM 05 LL | LL | PN 100 | 5 | M 8 x 1 K | 8 | 26,0 | 14,5 | 11 | 12 |
| VM 06 LL | LL | PN 100 | 6 | M 10 x 1 K | 8 | 26,0 | 14,5 | 11 | 12 |
| VM 06 LL 6 | LL | PN 100 | 6 | M 6 x 1 K | 8 | 27,5 | 14,5 | 11 | 12 |
| VM 06 LL 8 | LL | PN 100 | 6 | M 8 x 1 K | 8 | 26,0 | 14,5 | 11 | 12 |
| VM 08 LL | LL | PN 100 | 8 | M 10 x 1 K | 8 | 28,0 | 16,5 | 12 | 14 |
| VM 12 LL | LL | PN 100 | 12 | M 16 x 1.5 K | 12 | 32,0 | 20,0 | 17 | 19 |
| VMK NW 04 HL | L | PN 315 | 6 | M 10 x 1.5 K | 10 | 23,0 | 17,0 | 12 | 14 |
| VMK NW 06 HL | L | PN 315 | 8 | M 12 x 1.5 K | 12 | 25,0 | 20,0 | 17 | 17 |
| VMK NW 08 HL | L | PN 315 | 10 | M 14 x 1.5 K | 12 | 26,0 | 21,0 | 17 | 19 |
| VMK NW 10 HL | L | PN 315 | 12 | M 16 x 1.5 K | 12 | 27,0 | 22,0 | 19 | 22 |
| VMK NW 13 HL | L | PN 315 | 15 | M 18 x 1.5 K | 12 | 29,0 | 23,0 | 24 | 27 |
| VMK NW 16 HL | L | PN 315 | 18 | M 22 x 1.5 K | 14 | 31,0 | 25,5 | 27 | 32 |
| VMK NW 20 HL | L | PN 160 | 22 | M 26 x 1.5 k | 18 | 33,0 | 31,5 | 32 | 36 |
| VMK NW 25 HL | L | PN 160 | 28 | M 33 x 2 K | 20 | 34,0 | 34,5 | 41 | 41 |
| VMK NW 32 HL | L | PN 160 | 35 | M 42 x 2 K | 21 | 39,0 | 35,5 | 46 | 50 |
| VMK NW 40 HL | L | PN 160 | 42 | M 48 x 2 K | 22 | 42,0 | 38,0 | 55 | 60 |
| VMK NW 03 HS | S | PN 630 | 6 | M 12 x 1.5 K | 12 | 40,0 | 24,0 | 17 | 17 |
| VMK NW 04 HS | S | PN 630 | 8 | M 14 x 1.5 K | 12 | 42,0 | 25,0 | 17 | 19 |
| VMK NW 06 HS | S | PN 630 | 10 | M 16 x 1.5 K | 12 | 43,0 | 24,5 | 19 | 22 |
| VMK NW 08 HS | S | PN 630 | 12 | M 18 x 1.5 K | 12 | 45,0 | 26,5 | 22 | 24 |
| VMK NW 10 HS | S | PN 630 | 14 | M 20 x 1.5 K | 14 | 51,0 | 30,0 | 24 | 27 |
| VMK NW 13 HS | S | PN 400 | 16 | M 22 x 1.5 K | 14 | 51,0 | 31,5 | 27 | 30 |
| VMK NW 16 HS | S | PN 400 | 20 | M 27 x 2 K | 18 | 60,0 | 35,5 | 32 | 36 |
| VMK NW 20 HS | S | PN 400 | 25 | M 33 x 2 K | 20 | 67,0 | 38,0 | 41 | 46 |
| VMK NW 25 HS | S | PN 400 | 30 | M 42 x 2 K | 21 | 71,0 | 40,5 | 56 | 50 |
| VMK NW 32 HS | S | PN 315 | 38 | M 48 x 2 K | 22 | 79,0 | 44,0 | 55 | 60 |

结构系列:LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø = 管外径

产品变体

| | |
|--------|--------------|
| VMK MG | 旋入式螺栓连接, 黄铜 |
| VMK VA | 旋入式螺栓连接, 不锈钢 |
| XVMK | 旋入式螺栓连接, 钢 |