


KM BSP

防松螺母

HANSA FLEX

属性

| | |
|------|------------|
| 接口 1 | BSP内螺纹,圆柱形 |
| 结构类型 | 防松螺母 |
| 标准 | ISO 8434-3 |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

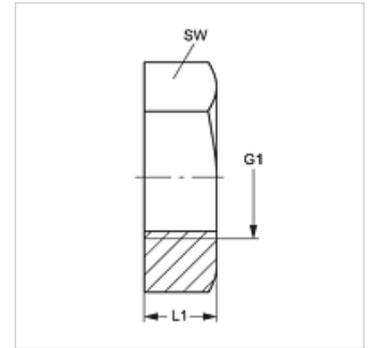

货品

| 名称 | G1 | L1 (mm) | SW (mm) |
|-----------|--------------|------------|------------|
| KM 02 BSP | G 1/8" -28 | 5 | 14 |
| KM 04 BSP | G 1/4" -19 | 6 | 19 |
| KM 06 BSP | G 3/8" -19 | 7 | 22 |
| KM 08 BSP | G 1/2" -14 | 8 | 27 |
| KM 10 BSP | G 5/8" -14 | 7 | 30 |
| KM 12 BSP | G 3/4" -14 | 9 | 32 |
| KM 16 BSP | G 1" -11 | 10 | 41 |
| KM 20 BSP | G 1.1/4" -11 | 13 | 50 |
| KM 24 BSP | G 1.1/2" -11 | 15 | 55 |
| KM 32 BSP | G 2" -11 | 15 | 70 |

SW = 对应边宽度