


## 属性

|        |                        |
|--------|------------------------|
| 接口 1   | BSP内螺纹,圆柱形             |
| 密封形式 1 | A型                     |
| 接口 2   | 米制外螺纹,圆柱形              |
| 密封形式 2 | 24°内锥                  |
| 结构类型   | 旋上式螺栓连接                |
| 结构形式   | 直道                     |
| 标准     | DIN 2353<br>ISO 8434-1 |
| 供货范围   | 接套(不带锁紧螺母和切割环)         |
| 原料     | 不锈钢                    |

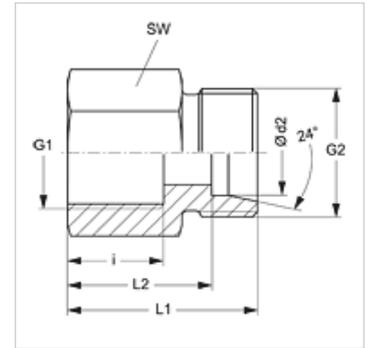

## 提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

## 货品

| 名称                   | 结构系列 | 工作压力 巴 | Ø d2 (mm) | G1           | G2         | i (mm) | L1 (mm) | L2 (mm) | SW (mm) |
|----------------------|------|--------|-----------|--------------|------------|--------|---------|---------|---------|
| XGAR NW 04 HL VA     | L    | PN 315 | 6         | G 1/8" -28   | M 12 x 1.5 | 12,0   | 26,0    | 19,0    | 14      |
| XGAR NW 04 HL 1/4 VA | L    | PN 315 | 6         | G 1/4" -19   | M 12 x 1.5 | 17,0   | 31,0    | 24,0    | 19      |
| XGAR NW 04 HL 3/8 VA | L    | PN 315 | 6         | G 3/8" -19   | M 12 x 1.5 | 17,0   | 32,0    | 25,0    | 22      |
| XGAR NW 04 HL 1/2 VA | L    | PN 315 | 6         | G 1/2" -14   | M 12 x 1.5 | 20,0   | 36,0    | 29,0    | 27      |
| XGAR NW 06 HL VA     | L    | PN 315 | 8         | G 1/4" -19   | M 14 x 1.5 | 17,0   | 31,0    | 24,0    | 19      |
| XGAR NW 06 HL 3/8 VA | L    | PN 315 | 8         | G 3/8" -19   | M 14 x 1.5 | 17,0   | 32,0    | 25,0    | 22      |
| XGAR NW 06 HL 1/2 VA | L    | PN 315 | 8         | G 1/2" -14   | M 14 x 1.5 | 20,0   | 36,0    | 29,0    | 27      |
| XGAR NW 08 HL VA     | L    | PN 315 | 10        | G 1/4" -19   | M 16 x 1.5 | 17,0   | 32,0    | 25,0    | 19      |
| XGAR NW 08 HL 3/8 VA | L    | PN 315 | 10        | G 3/8" -19   | M 16 x 1.5 | 17,0   | 33,0    | 26,0    | 22      |
| XGAR NW 08 HL 1/2 VA | L    | PN 315 | 10        | G 1/2" -14   | M 16 x 1.5 | 20,0   | 37,0    | 30,0    | 27      |
| XGAR NW 10 HL 1/4 VA | L    | PN 315 | 12        | G 1/4" -19   | M 18 x 1.5 | 17,0   | 32,0    | 25,0    | 19      |
| XGAR NW 10 HL VA     | L    | PN 315 | 12        | G 3/8" -19   | M 18 x 1.5 | 17,0   | 33,0    | 26,0    | 22      |
| XGAR NW 10 HL 1/2 VA | L    | PN 315 | 12        | G 1/2" -14   | M 18 x 1.5 | 20,0   | 37,0    | 30,0    | 27      |
| XGAR NW 13 HL 3/8 VA | L    | PN 315 | 15        | G 3/8" -19   | M 22 x 1.5 | 17,0   | 34,0    | 27,0    | 24      |
| XGAR NW 13 HL VA     | L    | PN 315 | 15        | G 1/2" -14   | M 22 x 1.5 | 20,0   | 38,0    | 31,0    | 27      |
| XGAR NW 16 HL 3/8 VA | L    | PN 315 | 18        | G 3/8" -19   | M 26 x 1.5 | 17,0   | 35,0    | 27,5    | 27      |
| XGAR NW 16 HL VA     | L    | PN 315 | 18        | G 1/2" -14   | M 26 x 1.5 | 20,0   | 38,0    | 30,5    | 27      |
| XGAR NW 20 HL 1/2 VA | L    | PN 160 | 22        | G 1/2" -14   | M 30 x 2   | 20,0   | 41,0    | 33,5    | 32      |
| XGAR NW 20 HL VA     | L    | PN 160 | 22        | G 3/4" -14   | M 30 x 2   | 22,0   | 43,0    | 35,5    | 32      |
| XGAR NW 25 HL VA     | L    | PN 160 | 28        | G 1" -11     | M 36 x 2   | 24,5   | 45,5    | 38,0    | 41      |
| XGAR NW 32 HL VA     | L    | PN 160 | 35        | G 1.1/4" -11 | M 45 x 2   | 26,5   | 51,5    | 41,0    | 50      |
| XGAR NW 40 HL VA     | L    | PN 160 | 42        | G 1.1/2" -11 | M 52 x 2   | 28,5   | 53,5    | 42,5    | 55      |
| XGAR NW 03 HS 1/8 VA | S    | PN 400 | 6         | G 1/8" -28   | M 14 x 1.5 | 12,0   | 28,0    | 21,0    | 17      |
| XGAR NW 03 HS VA     | S    | PN 630 | 6         | G 1/4" -19   | M 14 x 1.5 | 17,0   | 33,0    | 26,0    | 19      |
| XGAR NW 04 HS VA     | S    | PN 630 | 8         | G 1/4" -19   | M 16 x 1.5 | 17,0   | 33,0    | 26,0    | 19      |
| XGAR NW 06 HS VA     | S    | PN 630 | 10        | G 3/8" -19   | M 18 x 1.5 | 17,0   | 34,0    | 26,5    | 24      |
| XGAR NW 06 HS 1/2 VA | S    | PN 400 | 10        | G 1/2" -14   | M 18 x 1.5 | 20,0   | 38,0    | 30,5    | 27      |
| XGAR NW 08 HS 1/4 VA | S    | PN 400 | 12        | G 1/4" -19   | M 20 x 1.5 | 17,0   | 34,0    | 26,5    | 24      |
| XGAR NW 08 HS VA     | S    | PN 630 | 12        | G 3/8" -19   | M 20 x 1.5 | 17,0   | 34,0    | 26,5    | 24      |
| XGAR NW 08 HS 1/2 VA | S    | PN 400 | 12        | G 1/2" -14   | M 20 x 1.5 | 20,0   | 38,0    | 30,5    | 27      |
| XGAR NW 10 HS VA     | S    | PN 630 | 14        | G 1/2" -14   | M 22 x 1.5 | 20,0   | 40,0    | 32,0    | 27      |
| XGAR NW 13 HS VA     | S    | PN 400 | 16        | G 1/2" -14   | M 24 x 1.5 | 20,0   | 40,0    | 31,5    | 27      |
| XGAR NW 16 HS 3/8 VA | S    | PN 315 | 20        | G 3/8" -19   | M 30 x 2   | 17,0   | 38,0    | 27,5    | 36      |
| XGAR NW 16 HS 1/2 VA | S    | PN 315 | 20        | G 1/2" -14   | M 30 x 2   | 20,0   | 43,0    | 31,5    | 36      |
| XGAR NW 16 HS VA     | S    | PN 400 | 20        | G 3/4" -14   | M 30 x 2   | 22,0   | 45,0    | 34,5    | 36      |
| XGAR NW 20 HS VA     | S    | PN 400 | 25        | G 1" -11     | M 36 x 2   | 24,5   | 49,5    | 37,5    | 41      |
| XGAR NW 25 HS VA     | S    | PN 400 | 30        | G 1.1/4" -11 | M 42 x 2   | 26,5   | 55,5    | 42,0    | 50      |
| XGAR NW 32 HS VA     | S    | PN 315 | 38        | G 1.1/2" -11 | M 52 x 2   | 28,5   | 59,5    | 43,5    | 60      |

结构系列: LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø d2 = 管外直径

## 产品变体

|        |              |
|--------|--------------|
| XGAR   | 旋上式螺栓连接, 钢   |
| GAR VA | 旋上式螺栓连接, 不锈钢 |