


## 属性

|        |            |
|--------|------------|
| 接口 1   | 钎焊接口       |
| 接口 2   | BSP外螺纹,圆柱形 |
| 密封形式 2 | 60°内锥      |
| 结构类型   | 钎焊接套       |
| 结构形式   | 直道         |
| 原料     | 钢          |
| 表面保护   | oiled      |

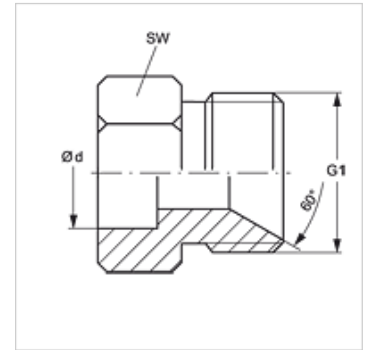

## 货品

| 名称            | Ø d<br>(mm) | G1         | L1<br>(mm) | SW<br>(mm) |
|---------------|-------------|------------|------------|------------|
| LOET 04 HB 08 | 8           | G 1/4" -19 | 21,0       | 19         |
| LOET 04 HB 12 | 12          | G 1/4" -19 | 21,0       | 19         |
| LOET 06 HB 14 | 14          | G 3/8" -19 | 27,0       | 24         |
| LOET 06 HB 16 | 16          | G 3/8" -19 | 27,0       | 24         |
| LOET 08 HB 14 | 14          | G 1/2" -14 | 29,5       | 29         |
| LOET 08 HB 16 | 16          | G 1/2" -14 | 29,5       | 24         |
| LOET 08 HB 18 | 18          | G 1/2" -14 | 29,5       | 29         |
| LOET 08 HB 20 | 20          | G 1/2" -14 | 32,5       | 29         |
| LOET 12 HB 20 | 20          | G 3/4" -14 | 37,5       | 35         |
| LOET 12 HB 25 | 25          | G 3/4" -14 | 37,5       | 35         |
| LOET 16 HB 25 | 25          | G 1" -11   | 41,0       | 43         |
| LOET 16 HB 30 | 30          | G 1" -11   | 41,0       | 43         |

Ø d = 管外直径