

W45 HRO HB

旋入式接套,角度45°

HANSA FLEX

属性

接口 1 BSP外螺纹,圆柱形

密封形式 1 G 型

接口 2 BSP外螺纹,圆柱形


密封形式 2 60°内锥

结构类型 方向可调节的旋入式接套

结构形式 角度45°

原料 钢

表面保护 电镀涂层

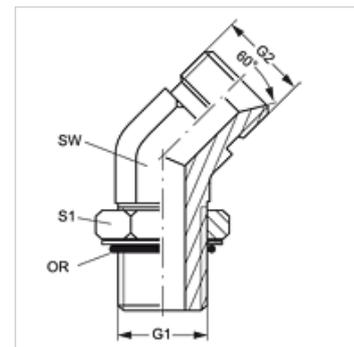

货品

| 名称 | G1 | G2 | SW (mm) | S1 | OR |
|------------------|--------------|--------------|------------|----|--------------|
| W45 HRO 02 HB | G 1/8" -28 | G 1/8" -28 | 11 | 16 | 7.65 x 1.78 |
| W45 HRO 04 HB 02 | G 1/4" -19 | G 1/8" -28 | 14 | 20 | 10.78 x 2.62 |
| W45 HRO 04 HB | G 1/4" -19 | G 1/4" -19 | 14 | 20 | 10.78 x 2.62 |
| W45 HRO 06 HB 04 | G 3/8" -19 | G 1/4" -19 | 14 | 24 | 13.94 x 2.62 |
| W45 HRO 06 HB | G 3/8" -19 | G 3/8" -19 | 19 | 24 | 13.94 x 2.62 |
| W45 HRO 06 HB 08 | G 3/8" -19 | G 1/2" -14 | 22 | 24 | 13.94 x 2.62 |
| W45 HRO 08 HB 06 | G 1/2" -14 | G 3/8" -19 | 22 | 28 | 17.86 x 2.62 |
| W45 HRO 08 HB | G 1/2" -14 | G 1/2" -14 | 22 | 28 | 17.86 x 2.62 |
| W45 HRO 08 HB 10 | G 1/2" -14 | G 5/8" -14 | 22 | 28 | 17.86 x 2.62 |
| W45 HRO 08 HB 12 | G 1/2" -14 | G 3/4" -14 | 27 | 28 | 17.86 x 2.62 |
| W45 HRO 12 HB 08 | G 3/4" -14 | G 1/2" -14 | 27 | 35 | 23.47 x 2.62 |
| W45 HRO 12 HB | G 3/4" -14 | G 3/4" -14 | 27 | 35 | 23.47 x 2.62 |
| W45 HRO 12 HB 16 | G 3/4" -14 | G 1" -11 | 27 | 35 | 23.47 x 2.62 |
| W45 HRO 16 HB 12 | G 1" -11 | G 3/4" -14 | 33 | 43 | 29.74 x 3.53 |
| W45 HRO 16 HB | G 1" -11 | G 1" -11 | 33 | 43 | 29.74 x 3.53 |
| W45 HRO 20 HB | G 1.1/4" -11 | G 1.1/4" -11 | 41 | 52 | 37.69 x 3.53 |
| W45 HRO 24 HB | G 1.1/2" -11 | G 1.1/2" -11 | 48 | 58 | 44.04 x 3.53 |

SW, S1, S2 = 对应边宽度