


# W45 HROK HJ

旋入式接套,角度45°

**HANSA FLEX**

## 属性

|        |               |
|--------|---------------|
| 接口 1   | BSP外螺纹,圆柱形    |
| 密封形式 1 | 螺纹接套带O形圈 + 腔环 |
| 接口 2   | UN/UNF外螺纹     |
| 密封形式 2 | 74°外锥         |
| 结构类型   | 方向可调节的旋入式接套   |
| 结构形式   | 角度45°         |
| 原料     | 钢             |
| 表面保护   | 电镀涂层          |

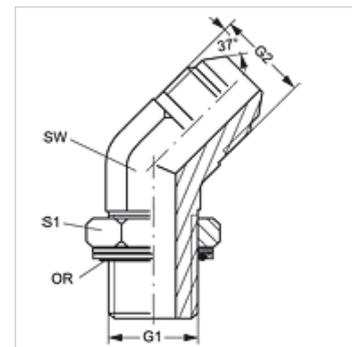

## 货品

| 名称                | G1           | G2             | SW<br>(mm) | S1 | OR           |
|-------------------|--------------|----------------|------------|----|--------------|
| W45 HROK 02 HJ 04 | G 1/8" -28   | 7/16" -20 UNF  | 11         | 14 | 8.00 x 2.00  |
| W45 HROK 02 HJ 05 | G 1/8" -28   | 1/2" -20 UNF   | 13         | 14 | 8.00 x 2.00  |
| W45 HROK 04 HJ    | G 1/4" -19   | 7/16" -20 UNF  | 19         | 14 | 10.77 x 2.62 |
| W45 HROK 04 HJ 05 | G 1/4" -19   | 1/2" -20 UNF   | 14         | 19 | 10.77 x 2.62 |
| W45 HROK 04 HJ 06 | G 1/4" -19   | 9/16" -18 UNF  | 14         | 19 | 10.77 x 2.62 |
| W45 HROK 04 HJ 08 | G 1/4" -19   | 3/4" -16 UNF   | 19         | 19 | 10.77 x 2.62 |
| W45 HROK 06 HJ 04 | G 3/8" -19   | 7/16" -20 UNF  | 19         | 22 | 13.94 x 2.62 |
| W45 HROK 06 HJ 05 | G 3/8" -19   | 1/2" -20 UNF   | 19         | 22 | 13.94 x 2.62 |
| W45 HROK 06 HJ    | G 3/8" -19   | 9/16" -18 UNF  | 19         | 22 | 13.94 x 2.62 |
| W45 HROK 06 HJ 08 | G 3/8" -19   | 3/4" -16 UNF   | 19         | 22 | 13.94 x 2.62 |
| W45 HROK 06 HJ 10 | G 3/8" -19   | 7/8" -14 UNF   | 22         | 22 | 13.94 x 2.62 |
| W45 HROK 08 HJ 04 | G 1/2" -14   | 7/16" -20 UNF  | 22         | 27 | 17.86 x 2.62 |
| W45 HROK 08 HJ 06 | G 1/2" -14   | 9/16" -18 UNF  | 22         | 27 | 17.86 x 2.62 |
| W45 HROK 08 HJ    | G 1/2" -14   | 3/4" -16 UNF   | 22         | 27 | 17.86 x 2.62 |
| W45 HROK 08 HJ 10 | G 1/2" -14   | 7/8" -14 UNF   | 22         | 27 | 17.86 x 2.62 |
| W45 HROK 08 HJ 12 | G 1/2" -14   | 1.1/16" -12 UN | 27         | 27 | 17.86 x 2.62 |
| W45 HROK 10 HJ    | G 5/8" -14   | 7/8" -14 UNF   | 22         | 27 | 19.70 x 2.62 |
| W45 HROK 10 HJ 12 | G 5/8" -14   | 1.1/16" -12 UN | 27         | 36 | 19.70 x 2.62 |
| W45 HROK 12 HJ 08 | G 3/4" -14   | 3/4" -16 UNF   | 27         | 36 | 23.47 x 2.62 |
| W45 HROK 12 HJ 10 | G 3/4" -14   | 7/8" -14 UNF   | 27         | 36 | 23.47 x 2.62 |
| W45 HROK 12 HJ    | G 3/4" -14   | 1.1/16" -12 UN | 27         | 36 | 23.47 x 2.62 |
| W45 HROK 12 HJ 16 | G 3/4" -14   | 1.5/16" -12 UN | 33         | 36 | 23.47 x 2.62 |
| W45 HROK 16 HJ 12 | G 1" -11     | 1.1/16" -12 UN | 33         | 41 | 29.74 x 3.53 |
| W45 HROK 16 HJ    | G 1" -11     | 1.5/16" -12 UN | 33         | 41 | 23.47 x 3.53 |
| W45 HROK 16 HJ 20 | G 1" -11     | 1.5/8" -12 UN  | 41         | 41 | 29.74 x 3.53 |
| W45 HROK 20 HJ 16 | G 1.1/4" -11 | 1.5/16" -12 UN | 33         | 50 | 37.69 x 3.53 |
| W45 HROK 20 HJ    | G 1.1/4" -11 | 1.5/8" -12 UN  | 41         | 50 | 37.96 x 3.53 |
| W45 HROK 20 HJ 24 | G 1.1/4" -11 | 1.7/8" -12 UN  | 48         | 50 | 37.69 x 3.53 |
| W45 HROK 24 HJ    | G 1.1/2" -11 | 1.7/8" -12 UN  | 48         | 55 | 44.04 x 3.53 |

SW, S1, S2 = 对应边宽度

## 备件

KAMMRING G 腔环,英寸制