


W90 HMO HJ

旋入式接套,角度90°

HANSA FLEX

属性

| | |
|--------|-------------|
| 接口 1 | 米制外螺纹,圆柱形 |
| 密封形式 1 | 旋入式接套上O形圈密封 |
| 接口 2 | UN/UNF外螺纹 |
| 密封形式 2 | 74°外锥 |
| 结构类型 | 方向可调节的旋入式接套 |
| 结构形式 | 角度90° |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

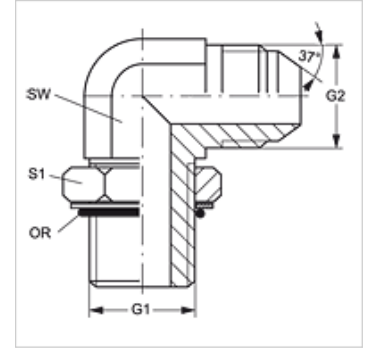

货品

| 名称 | G1 | G2 | SW (mm) | S1 | OR |
|------------------|------------|----------------|------------|----|------------|
| W90 HMO 10 HJ 04 | M 10 x 1 | 7/16" -20 UNF | 11 | 14 | 8.2 x 1.5 |
| W90 HMO 10 HJ 05 | M 10 x 1 | 1/2" -20 UNF | 13 | 14 | 8.2 x 1.5 |
| W90 HMO 12 HJ 04 | M 12 x 1.5 | 7/16" -20 UNF | 13 | 17 | 9.4 x 2.1 |
| W90 HMO 12 HJ 05 | M 12 x 1.5 | 1/2" -20 UNF | 13 | 17 | 9.4 x 2.1 |
| W90 HMO 14 HJ 04 | M 14 x 1.5 | 7/16" -20 UNF | 19 | 19 | 11.4 x 2.1 |
| W90 HMO 14 HJ 05 | M 14 x 1.5 | 1/2" -20 UNF | 13 | 19 | 11.4 x 2.1 |
| W90 HMO 14 HJ 06 | M 14 x 1.5 | 9/16" -18 UNF | 14 | 19 | 11.4 x 2.1 |
| W90 HMO 16 HJ 06 | M 16 x 1.5 | 9/16" -18 UNF | 19 | 22 | 13.4 x 2.1 |
| W90 HMO 16 HJ 08 | M 16 x 1.5 | 3/4" -16 UNF | 19 | 22 | 13.4 x 2.1 |
| W90 HMO 18 HJ 06 | M 18 x 1.5 | 9/16" -18 UNF | 22 | 22 | 15.4 x 2.1 |
| W90 HMO 18 HJ 08 | M 18 x 1.5 | 3/4" -16 UNF | 19 | 24 | 15.4 x 2.1 |
| W90 HMO 18 HJ 10 | M 18 x 1.5 | 7/8" -14 UNF | 22 | 24 | 15.4 x 2.1 |
| W90 HMO 20 HJ 08 | M 20 x 1.5 | 3/4" -16 UNF | 19 | 24 | 17.3 x 2.4 |
| W90 HMO 20 HJ 10 | M 20 x 1.5 | 7/8" -14 UNF | 22 | 24 | 17.3 x 2.4 |
| W90 HMO 22 HJ 08 | M 22 x 1.5 | 3/4" -16 UNF | 19 | 27 | 19.4 x 2.1 |
| W90 HMO 22 HJ 10 | M 22 x 1.5 | 7/8" -14 UNF | 22 | 27 | 19.4 x 2.1 |
| W90 HMO 22 HJ 12 | M 22 x 1.5 | 1.1/16" -12 UN | 27 | 27 | 19.4 x 2.1 |
| W90 HMO 27 HJ 12 | M 27 x 2 | 1.1/16" -12 UN | 27 | 32 | 23.7 x 2.8 |
| W90 HMO 27 HJ 16 | M 27 x 2 | 1.5/16" -12 UN | 33 | 32 | 23.7 x 2.8 |
| W90 HMO 33 HJ 16 | M 33 x 2 | 1.5/16" -12 UN | 33 | 41 | 29.7 x 2.8 |
| W90 HMO 42 HJ 20 | M 42 x 2 | 1.5/8" -12 UN | 41 | 50 | 38.7 x 2.8 |
| W90 HMO 48 HJ 24 | M 48 x 2 | 1.7/8" -12 UN | 48 | 55 | 46.7 x 2.8 |

SW, S1, S2 = 对应边宽度