


W90 HRK HB

旋入式接套,角度90°

HANSA FLEX

属性

| | |
|--------|-------------|
| 接口 1 | BSPT外螺纹,圆锥形 |
| 密封形式 1 | 螺纹密封式 |
| 接口 2 | BSP外螺纹,圆柱形 |
| 密封形式 2 | 60°内锥 |
| 结构类型 | 旋入式接套 |
| 结构形式 | 角度90° |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

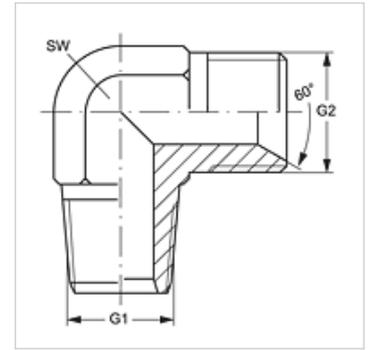

货品

| 名称 | G1 | G2 | SW (mm) |
|------------------|------------|--------------|------------|
| W90 HRK 02 HB | R 1/8" K | G 1/8" -28 | 11 |
| W90 HRK 02 HB 04 | R 1/8" K | G 1/4" -19 | 11 |
| W90 HRK 04 HB 02 | R 1/4" K | G 1/8" -28 | 14 |
| W90 HRK 04 HB | R 1/4" K | G 1/4" -19 | 14 |
| W90 HRK 04 HB 06 | R 1/4" K | G 3/8" -19 | 14 |
| W90 HRK 06 HB 04 | R 3/8" K | G 1/4" -19 | 14 |
| W90 HRK 06 HB | R 3/8" K | G 3/8" -19 | 17 |
| W90 HRK 06 HB 08 | R 3/8" K | G 1/2" -14 | 19 |
| W90 HRK 08 HB 06 | R 1/2" K | G 3/8" -19 | 19 |
| W90 HRK 08 HB | R 1/2" K | G 1/2" -14 | 19 |
| W90 HRK 08 HB 12 | R 1/2" K | G 3/4" -14 | 27 |
| W90 HRK 12 HB 08 | R 3/4" K | G 1/2" -14 | 27 |
| W90 HRK 12 HB | R 3/4" K | G 3/4" -14 | 27 |
| W90 HRK 12 HB 16 | R 3/4" K | G 1" -11 | 33 |
| W90 HRK 16 HB 12 | R 1" K | G 3/4" -14 | 33 |
| W90 HRK 16 HB | R 1" K | G 1" -11 | 36 |
| W90 HRK 20 HB | R 1.1/4" K | G 1.1/4" -11 | 41 |
| W90 HRK 24 HB | R 1.1/2" K | G 1.1/2" -11 | 48 |
| W90 HRK 32 HB | R 2" K | G 2" -11 | 64 |

SW = 对应边宽度