

# G VKS ST 400

四方法兰, Cetop, 预焊接束

## 属性


结构类型 四方法兰 Cetop

结构形式 直道

标准 CETOP RP 63H  
ISO 6164

原料 S355J2G3 (ST52.3)

表面保护 经黑色润滑油处理

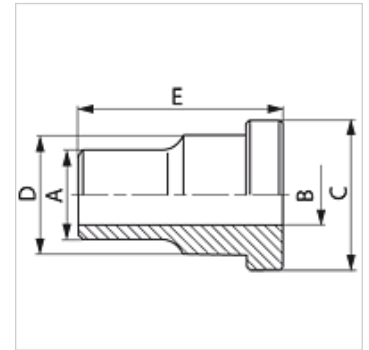

## 货品

| 名称               | 压力 PB<br>(bar) | 结构尺寸   | A<br>(mm) | Ø B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) |
|------------------|----------------|--------|-----------|-------------|-----------|-----------|-----------|
| G VKS 38 ST 400  | 400            | 3/8"   | 18        | 11,0        | 26,0      | 18        | 35        |
| G VKS 12 ST 400  | 400            | 1/2"   | 22        | 14,0        | 31,8      | 24        | 40        |
| G VKS 34 ST 400  | 400            | 3/4"   | 28        | 18,0        | 39,5      | 32        | 45        |
| G VKS 1 ST 400   | 400            | 1"     | 35        | 22,0        | 47,6      | 38        | 50        |
| G VKS 114 ST 400 | 400            | 1.1/4" | 44        | 29,0        | 54,0      | 44        | 55        |
| G VKS 112 ST 400 | 400            | 1.1/2" | 51        | 35,0        | 63,5      | 51        | 60        |
| G VKS 2 ST 400   | 400            | 2"     | 61        | 43,0        | 79,4      | 67        | 70        |
| G VKS 212 ST 400 | 400            | 2.1/2" | 80        | 53,0        | 94,2      | 60        | 80        |
| G VKS 3 ST 400   | 400            | 3"     | 90        | 58,0        | 104,0     | 90        | 90        |
| G VKS 312 ST 400 | 400            | 3.1/2" | 102       | 63,0        | 119,0     | 102       | 90        |
| G VKS 4 ST 400   | 400            | 4"     | 114       | 74,0        | 131,0     | 114       | 105       |

结构系列: LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力