


### 属性

|      |             |
|------|-------------|
| 结构类型 | 泵接口(3孔)     |
| 结构形式 | 角度90°       |
| 固定   | 带米制螺钉组件     |
| 供货范围 | 带米制螺钉组件和O形圈 |
| 原料   | 钢 ST 42.3   |
| 表面保护 | 电镀涂层        |

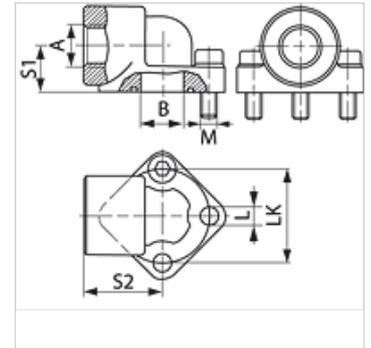

### 货品

| 名称          | 压力 PB<br>(bar) | LK<br>(mm) | A          | B<br>(mm) | S1<br>(mm) | S2<br>(mm) | L<br>(mm) | 螺钉              | OR           |
|-------------|----------------|------------|------------|-----------|------------|------------|-----------|-----------------|--------------|
| WDS 0.5 12  | 315            | 26         | G 1/2" -14 | 11,0      | 17         | 24         | 5,3       | (3 x) M 5 x 20  | 14.00 x 1.78 |
| WDS 0.5 38  | 315            | 26         | G 3/8" -19 | 11,0      | 17         | 24         | 5,3       | (3 x) M 5 x 20  | 14.00 x 1.78 |
| WDS 1 12    | 315            | 30         | G 1/2" -14 | 12,0      | 17         | 24         | 6,3       | (3 x) M 6 x 20  | 15.88 x 2.62 |
| WDS 1 38    | 315            | 30         | G 3/8" -19 | 12,0      | 17         | 24         | 6,3       | (3 x) M 6 x 20  | 15.88 x 2.62 |
| WDS 2 12    | 315            | 40         | G 1/2" -14 | 19,0      | 21         | 36         | 8,5       | (3 x) M 8 x 25  | 23.81 x 2.62 |
| WDS 2 34    | 315            | 40         | G 3/4" -14 | 19,0      | 21         | 36         | 8,5       | (3 x) M 8 x 25  | 23.81 x 2.62 |
| WDS 3 100   | 315            | 51         | G 1" -11   | 24,0      | 26         | 45         | 10,5      | (3 x) M 10 x 30 | 31.42 x 2.62 |
| WDS 3 34    | 315            | 51         | G 3/4" -14 | 26,0      | 26         | 45         | 10,5      | (3 x) M 10 x 30 | 31.42 x 2.62 |
| WDS 3 B 100 | 315            | 56         | G 1" -11   | 26,0      | 26         | 45         | 10,5      | (3 x) M 10 x 30 | 31.42 x 2.62 |
| WDS 3 B 34  | 315            | 56         | G 3/4" -14 | 26,0      | 26         | 45         | 10,5      | (3 x) M 10 x 30 | 31.42 x 2.62 |

PN = 额定压力 PB = 最大工作压力