


GVR 90

旋转螺栓连接, W90°, 滑动轴承

HANSA FLEX

属性

| | |
|--------|----------------|
| 接口 1 | BSP外螺纹, 圆柱形 |
| 密封形式 1 | E型 |
| 接口 2 | 米制外螺纹, 圆柱形 |
| 密封形式 2 | 24°内锥 |
| 结构类型 | 旋转螺栓连接(旋入式连接) |
| 结构类型补充 | 滑动轴承 |
| 结构形式 | 角度90° |
| 供货范围 | 接管(不带锁紧螺母和切割环) |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

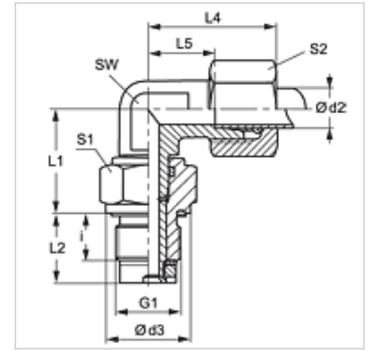

提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

货品

| 名称 | 结构系列 | 工作压力巴 | Ø d2 (mm) | G1 | d3 (mm) | i (mm) | L1 (mm) | L2 (mm) | L4 (mm) | L5 (mm) | SW (mm) | S1 | S2 |
|-----------------------|------|--------|--------------|--------------|------------|-----------|------------|------------|------------|------------|------------|----|----|
| GVR 90 NW 04 HL 1/4 | L | PN 40 | 6 | G 1/4" -19 | 19 | 12 | 20,0 | 18,0 | 27 | 12,0 | 12 | 19 | 14 |
| GVR 90 NW 06 HL | L | PN 40 | 8 | G 1/4" -19 | 19 | 12 | 21,0 | 18,0 | 29 | 14,0 | 12 | 19 | 17 |
| GVR 90 NW 08 HL 3/8 | L | PN 40 | 10 | G 3/8" -19 | 22 | 12 | 26,0 | 18,0 | 30 | 15,0 | 14 | 24 | 19 |
| GVR 90 NW 10 HL 1/2 | L | PN 40 | 12 | G 1/2" -14 | 27 | 14 | 27,0 | 21,0 | 32 | 17,0 | 17 | 27 | 22 |
| GVR 90 NW 13 HL 3/4 | L | PN 40 | 15 | G 3/4" -14 | 32 | 16 | 33,0 | 24,0 | 36 | 21,0 | 19 | 32 | 27 |
| GVR 90 NW 16 HL 1 | L | PN 40 | 18 | G 1" -11 | 40 | 18 | 37,5 | 27,5 | 40 | 23,5 | 27 | 41 | 32 |
| GVR 90 NW 20 HL 1 | L | PN 40 | 22 | G 1" -11 | 40 | 18 | 39,5 | 27,5 | 44 | 27,5 | 27 | 41 | 36 |
| GVR 90 NW 25 HL 1 1/4 | L | PN 40 | 28 | G 1.1/4" -11 | 50 | 20 | 44,0 | 31,0 | 47 | 30,5 | 36 | 50 | 41 |
| GVR 90 NW 32 HL 1 1/2 | L | PN 40 | 35 | G 1.1/2" -11 | 55 | 22 | 54,0 | 35,0 | 56 | 34,5 | 41 | 55 | 50 |
| GVR 90 NW 03 HS | S | PN 100 | 6 | G 1/4" -19 | 19 | 12 | 21,0 | 18,0 | 31 | 16,0 | 12 | 19 | 17 |
| GVR 90 NW 04 HS | S | PN 100 | 8 | G 1/4" -19 | 19 | 12 | 22,0 | 18,0 | 32 | 17,0 | 14 | 19 | 19 |
| GVR 90 NW 06 HS | S | PN 100 | 10 | G 3/8" -19 | 22 | 12 | 27,0 | 18,0 | 34 | 17,5 | 17 | 24 | 22 |
| GVR 90 NW 08 HS 1/2 | S | PN 100 | 12 | G 1/2" -14 | 27 | 14 | 28,0 | 21,0 | 38 | 21,5 | 17 | 27 | 24 |
| GVR 90 NW 13 HS 3/4 | S | PN 100 | 16 | G 3/4" -14 | 32 | 16 | 34,0 | 24,0 | 43 | 24,5 | 24 | 32 | 30 |
| GVR 90 NW 16 HS 1 | S | PN 100 | 20 | G 1" -11 | 40 | 18 | 39,5 | 27,5 | 48 | 26,5 | 27 | 41 | 36 |
| GVR 90 NW 20 HS | S | PN 100 | 25 | G 1" -11 | 40 | 18 | 42,5 | 27,5 | 54 | 30,0 | 36 | 41 | 46 |
| GVR 90 NW 25 HS | S | PN 100 | 30 | G 1.1/4" -11 | 50 | 20 | 48,0 | 31,0 | 62 | 35,5 | 41 | 50 | 50 |
| GVR 90 NW 32 HS | S | PN 100 | 38 | G 1.1/2" -11 | 55 | 22 | 55,0 | 35,0 | 72 | 41,0 | 50 | 55 | 60 |

结构系列: LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø d2 = 管外直径