


# SDOM VA

回转式螺栓连接,无节流,角度90°

**HANSA FLEX**

| 属性     |                        |
|--------|------------------------|
| 接口 1   | 米制外螺纹,圆柱形              |
| 密封形式 1 | F型                     |
| 接口 2   | 米制外螺纹,圆柱形              |
| 密封形式 2 | 24°内锥                  |
| 结构类型   | 回转式螺栓连接,无节流            |
| 结构形式   | 角度90°                  |
| 标准     | DIN 2353<br>ISO 8434-1 |
| 供货范围   | 带锁紧螺母和切割环的接套           |
| 原料     | 不锈钢                    |

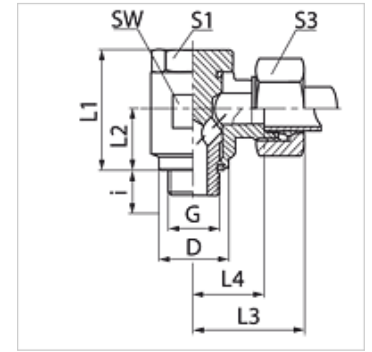

## 订购指南

NBR 材料制成的密封件

FPM (氟胶) 应客户要求提供

## 货品

| 名称               | 结构系列 | 工作压力巴  | 管外径 Ø (mm) | G          | D (mm) | i (mm) | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | SW (mm) | S1 | S3 | OR           |
|------------------|------|--------|------------|------------|--------|--------|---------|---------|---------|---------|---------|----|----|--------------|
| SDOM 04 LL VA    | LL   | PN 100 | 4          | M 8 x 1    | 14,7   | 8,0    | 23,5    | 10,5    | 29,0    | 11,0    | 18      | 17 | 10 | 6.10 x 1.60  |
| SDOM 06 LL VA    | LL   | PN 100 | 6          | M 10 x 1   | 14,7   | 8,0    | 23,5    | 10,5    | 28,0    | 13,5    | 17      | 17 | 12 | 7.65 x 1.78  |
| SDOM 08 LL VA    | LL   | PN 100 | 8          | M 10 x 1   | 14,7   | 8,0    | 23,5    | 10,5    | 28,0    | 13,5    | 17      | 17 | 14 | 7.65 x 1.78  |
| SDOM NW 04 HL VA | L    | PN 315 | 6          | M 10 x 1   | 14,7   | 8,0    | 23,5    | 10,5    | 27,0    | 12,0    | 17      | 17 | 14 | 7.65 x 1.78  |
| SDOM NW 06 HL VA | L    | PN 315 | 8          | M 12 x 1.5 | 17,7   | 12,5   | 29,5    | 14,0    | 29,5    | 14,5    | 22      | 19 | 17 | 11.10 x 1.78 |
| SDOM NW 08 HL VA | L    | PN 315 | 10         | M 14 x 1.5 | 18,7   | 12,0   | 30,0    | 14,0    | 30,5    | 15,5    | 22      | 19 | 19 | 11.10 x 1.78 |
| SDOM NW 10 HL VA | L    | PN 315 | 12         | M 16 x 1.5 | 22,7   | 12,0   | 35,0    | 16,5    | 33,0    | 18,0    | 27      | 24 | 22 | 14.00 x 1.78 |
| SDOM NW 13 HL VA | L    | PN 315 | 15         | M 18 x 1.5 | 23,7   | 12,0   | 46,0    | 21,5    | 36,5    | 21,5    | 32      | 27 | 27 | 18.77 x 1.78 |
| SDOM NW 16 HL VA | L    | PN 315 | 18         | M 22 x 1.5 | 27,7   | 11,4   | 46,7    | 21,5    | 38,0    | 21,0    | 32      | 27 | 32 | 18.77 x 1.78 |
| SDOM NW 20 HL VA | L    | PN 160 | 22         | M 26 x 1.5 | 32,7   | 16,0   | 52,0    | 24,0    | 44,0    | 27,5    | 41      | 36 | 36 | 23.81 x 2.62 |
| SDOM NW 25 HL VA | L    | PN 160 | 28         | M 33 x 2   | 39,7   | 18,0   | 64,0    | 30,5    | 48,5    | 32,0    | 50      | 46 | 41 | 29.82 x 2.62 |
| SDOM NW 32 HL VA | L    | PN 160 | 35         | M 42 x 2   | 49,7   | 20,0   | 75,0    | 35,5    | 57,5    | 36,0    | 60      | 50 | 50 | 37.77 x 2.62 |
| SDOM NW 40 HL VA | L    | PN 160 | 42         | M 48 x 2   | 55,7   | 22,0   | 88,0    | 40,5    | 62,0    | 38,5    | 70      | 60 | 60 | 41.28 x 3.53 |
| SDOM NW 03 HS VA | S    | PN 400 | 6          | M 12 x 1.5 | 17,7   | 12,0   | 30,0    | 14,0    | 31,5    | 16,5    | 22      | 19 | 17 | 11.10 x 1.78 |
| SDOM NW 04 HS VA | S    | PN 400 | 8          | M 14 x 1.5 | 18,7   | 12,0   | 30,0    | 14,0    | 30,0    | 14,5    | 22      | 19 | 19 | 11.10 x 1.78 |
| SDOM NW 06 HS VA | S    | PN 400 | 10         | M 16 x 1.5 | 22,7   | 12,0   | 35,0    | 16,5    | 35,0    | 18,5    | 27      | 24 | 22 | 14.00 x 1.78 |
| SDOM NW 08 HS VA | S    | PN 400 | 12         | M 18 x 1.5 | 23,7   | 12,0   | 35,0    | 16,5    | 35,0    | 18,5    | 27      | 24 | 24 | 18.77 x 1.78 |
| SDOM NW 10 HS VA | S    | PN 400 | 14         | M 20 x 1.5 | 25,7   | 14,0   | 46,0    | 21,5    | 40,5    | 22,5    | 32      | 27 | 27 | 18.77 x 1.78 |
| SDOM NW 13 HS VA | S    | PN 315 | 16         | M 22 x 1.5 | 27,7   | 14,0   | 46,0    | 21,5    | 41,0    | 22,5    | 32      | 27 | 30 | 18.77 x 1.78 |
| SDOM NW 16 HS VA | S    | PN 315 | 20         | M 27 x 2   | 32,7   | 16,0   | 52,0    | 24,0    | 48,0    | 26,5    | 41      | 36 | 36 | 23.81 x 2.62 |
| SDOM NW 20 HS VA | S    | PN 250 | 25         | M 33 x 2   | 39,7   | 18,0   | 64,0    | 30,5    | 55,5    | 31,5    | 50      | 46 | 46 | 29.38 x 2.62 |
| SDOM NW 25 HS VA | S    | PN 160 | 30         | M 42 x 2   | 49,7   | 20,0   | 75,0    | 35,5    | 63,5    | 37,0    | 60      | 50 | 50 | 37.77 x 2.62 |
| SDOM NW 32 HS VA | S    | PN 160 | 38         | M 48 x 2   | 55,7   | 23,0   | 87,0    | 40,5    | 72,5    | 41,5    | 70      | 60 | 60 | 41.28 x 3.53 |

结构系列:LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø = 管外径

## 产品变体

|       |                      |
|-------|----------------------|
| SDOM  | 回转式螺栓连接,无节流,角度90°, 钢 |
| XSDOM | 回转式螺栓连接,无节流,角度90°, 钢 |