


## 属性

|        |                        |
|--------|------------------------|
| 接口 1   | NPT外螺纹                 |
| 密封形式 1 | 螺纹密封式                  |
| 接口 2   | 米制外螺纹,圆柱形              |
| 密封形式 2 | 24°内锥                  |
| 结构类型   | 旋入式螺栓连接                |
| 结构形式   | 角度90°                  |
| 标准     | DIN 2353<br>ISO 8434-1 |
| 供货范围   | 带锁紧螺母和切割环的接套           |
| 原料     | 钢                      |
| 表面保护   | 电镀涂层                   |

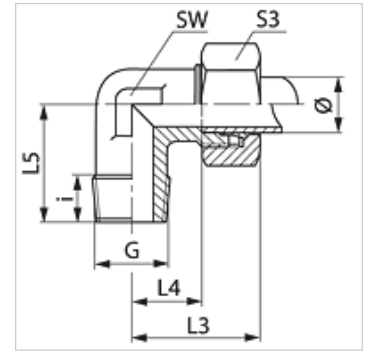

## 提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

## 货品

| 名称              | 结构系列 | 工作压力 巴 | 管外径 Ø (mm) | G                | i (mm) | L3 (mm) | L4 (mm) | L5 (mm) | SW (mm) | S3 |
|-----------------|------|--------|------------|------------------|--------|---------|---------|---------|---------|----|
| WN 04 LL        | LL   | PN 100 | 4          | 1/8" -27 NPT     | 7,0    | 21      | 11,0    | 17      | 9       | 10 |
| WN 05 LL        | LL   | PN 100 | 5          | 1/8" -27 NPT     | 8,0    | 21      | 11,0    | 18      | 11      | 10 |
| WN 06 LL        | LL   | PN 100 | 6          | 1/8" -27 NPT     | 10,0   | 21      | 9,5     | 17      | 9       | 12 |
| WN 08 LL        | LL   | PN 100 | 8          | 1/8" -27 NPT     | 10,0   | 21      | 9,5     | 17      | 12      | 14 |
| WN NW 04 HL     | L    | PN 315 | 6          | 1/8" -27 NPT     | 10,0   | 27      | 12,0    | 20      | 12      | 14 |
| WN NW 04 HL 1/4 | L    | PN 315 | 6          | 1/4" -18 NPT     | 12,0   | 29      | 14,0    | 26      | 12      | 14 |
| WN NW 04 HL 1/2 | L    | PN 315 | 6          | 1/2" -14 NPT     | 17,0   | 38      | 23,0    | 34      | 19      | 14 |
| WN NW 06 HL     | L    | PN 315 | 8          | 1/4" -18 NPT     | 12,0   | 29      | 14,0    | 26      | 12      | 17 |
| WN NW 06 HL 3/8 | L    | PN 315 | 8          | 3/8" -18 NPT     | 15,2   | 23      | 11,5    | 20      | 12      | 17 |
| WN NW 06 HL 1/2 | L    | PN 315 | 8          | 1/2" -14 NPT     | 17,5   | 30      | 15,0    | 26      | 12      | 17 |
| WN NW 08 HL     | L    | PN 315 | 10         | 1/4" -18 NPT     | 14,0   | 30      | 15,0    | 27      | 14      | 19 |
| WN NW 08 HL 3/8 | L    | PN 315 | 10         | 3/8" -18 NPT     | 15,2   | 30      | 15,0    | 27      | 14      | 19 |
| WN NW 10 HL     | L    | PN 315 | 12         | 3/8" -18 NPT     | 12,5   | 32      | 17,0    | 28      | 17      | 22 |
| WN NW 10 HL 1/4 | L    | PN 315 | 12         | 1/4" -18 NPT     | 14,0   | 32      | 17,0    | 28      | 17      | 22 |
| WN NW 10 HL 1/2 | L    | PN 315 | 12         | 1/2" -14 NPT     | 19,0   | 38      | 23,0    | 34      | 19      | 22 |
| WN NW 13 HL     | L    | PN 315 | 15         | 1/2" -14 NPT     | 18,5   | 36      | 21,0    | 34      | 19      | 27 |
| WN NW 13 HL 3/8 | L    | PN 315 | 15         | 3/8" -18 NPT     | 13,0   | 36      | 21,0    | 34      | 19      | 27 |
| WN NW 16 HL     | L    | PN 315 | 18         | 1/2" -14 NPT     | 20,0   | 40      | 23,5    | 36      | 24      | 32 |
| WN NW 16 HL 3/4 | L    | PN 315 | 18         | 3/4" -14 NPT     | 18,5   | 40      | 23,5    | 40      | 24      | 32 |
| WN NW 20 HL     | L    | PN 160 | 22         | 3/4" -14 NPT     | 18,5   | 44      | 27,5    | 42      | 27      | 36 |
| WN NW 25 HL     | L    | PN 160 | 28         | 1" -11.5 NPT     | 24,0   | 47      | 30,5    | 48      | 36      | 41 |
| WN NW 32 HL     | L    | PN 160 | 35         | 1.1/4" -11.5 NPT | 25,5   | 56      | 34,5    | 54      | 41      | 50 |
| WN NW 40 HL     | L    | PN 160 | 42         | 1.1/2" -11.5 NPT | 26,0   | 63      | 40,0    | 61      | 50      | 60 |
| WN NW 03 HS     | S    | PN 630 | 6          | 1/4" -18 NPT     | 12,0   | 31      | 16,0    | 26      | 12      | 17 |
| WN NW 04 HS     | S    | PN 630 | 8          | 1/4" -18 NPT     | 15,0   | 32      | 17,0    | 27      | 14      | 19 |
| WN NW 06 HS     | S    | PN 630 | 10         | 3/8" -18 NPT     | 12,0   | 34      | 17,5    | 28      | 17      | 22 |
| WN NW 08 HS     | S    | PN 630 | 12         | 3/8" -18 NPT     | 12,5   | 38      | 21,5    | 28      | 17      | 24 |
| WN NW 10 HS     | S    | PN 630 | 14         | 1/2" -14 NPT     | 18,0   | 40      | 22,0    | 34      | 19      | 27 |
| WN NW 13 HS     | S    | PN 400 | 16         | 1/2" -14 NPT     | 19,0   | 43      | 24,5    | 36      | 24      | 30 |
| WN NW 13 HS 3/4 | S    | PN 400 | 16         | 3/4" -14 NPT     | 20,0   | 43      | 25,0    | 40      | 24      | 30 |
| WN NW 16 HS     | S    | PN 400 | 20         | 3/4" -14 NPT     | 20,0   | 48      | 26,6    | 42      | 27      | 36 |
| WN NW 20 HS     | S    | PN 400 | 25         | 1" -11.5 NPT     | 24,0   | 54      | 30,0    | 48      | 36      | 46 |
| WN NW 25 HS     | S    | PN 400 | 30         | 1.1/4" -11.5 NPT | 25,5   | 62      | 35,5    | 54      | 41      | 50 |
| WN NW 32 HS     | S    | PN 315 | 38         | 1.1/2" -11.5 NPT | 26,0   | 72      | 41,0    | 61      | 50      | 60 |

PN = 额定压力 PB = 最大工作压力 - 结构系列: LL=非常轻 L=轻 S=重 - Ø = 管外径

## 产品变体

|       |                    |
|-------|--------------------|
| WN MG | 旋入式螺栓连接,角度90°, 黄铜  |
| WN VA | 旋入式螺栓连接,角度90°, 不锈钢 |
| XWN   | 旋入式螺栓连接,角度90°, 钢   |