


# WRK VA

旋入式螺栓连接,角度90°

## 属性

|        |                        |
|--------|------------------------|
| 接口 1   | BSPT外螺纹,圆锥形            |
| 密封形式 1 | 螺纹密封式                  |
| 接口 2   | 米制外螺纹,圆柱形              |
| 密封形式 2 | 24°内锥                  |
| 结构类型   | 旋入式螺栓连接                |
| 结构形式   | 角度90°                  |
| 标准     | DIN 2353<br>ISO 8434-1 |
| 供货范围   | 带锁紧螺母和切割环的接套           |
| 原料     | 不锈钢                    |

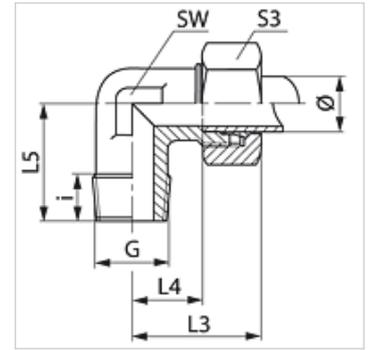

## 提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

## 货品

| 名称                 | 结构系列 | 工作压力 巴 | 管外径 Ø (mm) | G        | i (mm) | L3 (mm) | L4 (mm) | L5 (mm) | SW (mm) | S3 |
|--------------------|------|--------|------------|----------|--------|---------|---------|---------|---------|----|
| WR 04 LL VA        | LL   | PN 100 | 4          | R 1/8" K | 8      | 21,0    | 11,0    | 18      | 11      | 10 |
| WR 06 LL VA        | LL   | PN 100 | 6          | R 1/8" K | 8      | 22,0    | 10,0    | 17      | 11      | 12 |
| WR 08 LL VA        | LL   | PN 100 | 8          | R 1/8" K | 8      | 23,0    | 11,5    | 20      | 12      | 14 |
| WR NW 04 HL VA     | L    | PN 315 | 6          | R 1/8" K | 8      | 27,0    | 12,0    | 20      | 12      | 14 |
| WR NW 04 HL 1/4 VA | L    | PN 315 | 6          | R 1/4" K | 12     | 29,0    | 14,0    | 26      | 12      | 14 |
| WR NW 04 HL 3/8 VA | L    | PN 315 | 6          | R 3/8" K | 12     | 29,0    | 14,0    | 26      | 12      | 14 |
| WR NW 04 HL 1/2 VA | L    | PN 315 | 6          | R 1/2" K | 14     | 30,5    | 15,5    | 30      | 17      | 14 |
| WR NW 06 HL 1/8 VA | L    | PN 315 | 8          | R 1/8" K | 8      | 29,0    | 14,0    | 26      | 12      | 17 |
| WR NW 06 HL VA     | L    | PN 315 | 8          | R 1/4" K | 12     | 29,0    | 14,0    | 26      | 12      | 17 |
| WR NW 06 HL 3/8 VA | L    | PN 315 | 8          | R 3/8" K | 12     | 34,0    | 19,0    | 28      | 17      | 17 |
| WR NW 06 HL 1/2 VA | L    | PN 315 | 8          | R 1/2" K | 13     | 34,0    | 19,0    | 30      | 17      | 17 |
| WR NW 08 HL 1/8 VA | L    | PN 315 | 10         | R 1/8" K | 8      | 30,0    | 15,0    | 26      | 14      | 19 |
| WR NW 08 HL VA     | L    | PN 315 | 10         | R 1/4" K | 12     | 30,0    | 15,0    | 27      | 14      | 19 |
| WR NW 08 HL 3/8 VA | L    | PN 315 | 10         | R 3/8" K | 12     | 32,0    | 17,0    | 28      | 17      | 19 |
| WR NW 08 HL 1/2 VA | L    | PN 316 | 10         | R 1/2" K | 14     | 38,0    | 23,0    | 34      | 19      | 19 |
| WR NW 10 HL 1/8 VA | L    | PN 315 | 12         | R 1/8" K | 8      | 32,0    | 17,5    | 27      | 17      | 22 |
| WR NW 10 HL 1/4 VA | L    | PN 315 | 12         | R 1/4" K | 12     | 32,0    | 17,0    | 28      | 17      | 22 |
| WR NW 10 HL VA     | L    | PN 315 | 12         | R 3/8" K | 12     | 32,0    | 17,0    | 28      | 17      | 22 |
| WR NW 10 HL 1/2 VA | L    | PN 315 | 12         | R 1/2" K | 14     | 38,0    | 23,0    | 34      | 19      | 22 |
| WR NW 13 HL 1/4 VA | L    | PN 315 | 15         | R 1/4" K | 12     | 36,0    | 21,0    | 30      | 19      | 27 |
| WR NW 13 HL 3/8 VA | L    | PN 315 | 15         | R 3/8" K | 12     | 36,0    | 21,0    | 34      | 19      | 27 |
| WR NW 13 HL VA     | L    | PN 315 | 15         | R 1/2" K | 14     | 36,0    | 21,0    | 34      | 19      | 27 |
| WR NW 13 HL 3/4 VA | L    | PN 160 | 15         | R 3/4" K | 16     | 36,0    | 21,0    | 34      | 24      | 27 |
| WR NW 16 HL 3/8 VA | L    | PN 315 | 18         | R 3/8" K | 12     | 40,0    | 23,5    | 34      | 24      | 32 |
| WR NW 16 HL VA     | L    | PN 315 | 18         | R 1/2" K | 14     | 40,0    | 23,5    | 36      | 24      | 32 |
| WR NW 16 HL 3/4 VA | L    | PN 160 | 18         | R 3/4" K | 16     | 36,0    | 27,5    | 44      | 27      | 32 |
| WR NW 20 HL 1/2 VA | L    | PN 160 | 22         | R 1/2" K | 14     | 44,0    | 27,5    | 41      | 27      | 36 |
| WRK NW 20 HL VA    | L    | PN 160 | 22         | R 3/4" K | 16     | 44,0    | 27,5    | 31      | 27      | 36 |
| WRK NW 25 HL VA    | L    | PN 160 | 28         | R 1" K   | 20     | 51,5    | 30,5    | 47      | 36      | 41 |
| WR NW 03 HS 1/8 VA | S    | PN 400 | 6          | R 1/8" K | 8      | 29,5    | 15,0    | 25      | 8       | 12 |
| WR NW 03 HS VA     | S    | PN 400 | 6          | R 1/4" K | 12     | 31,0    | 16,0    | 26      | 12      | 17 |
| WR NW 03 HS 3/8 VA | S    | PN 400 | 6          | R 3/8" K | 12     | 32,0    | 17,5    | 27      | 14      | 17 |
| WR NW 03 HS 1/2 VA | S    | PN 400 | 6          | R 1/2" K | 14     | 34,0    | 19,0    | 33      | 17      | 17 |
| WR NW 04 HS VA     | S    | PN 400 | 8          | R 1/4" K | 12     | 32,0    | 17,0    | 27      | 17      | 19 |
| WR NW 04 HS 3/8 VA | S    | PN 400 | 8          | R 3/8" K | 12     | 33,0    | 18,0    | 28      | 14      | 19 |
| WR NW 04 HS 1/2 VA | S    | PN 400 | 8          | R 1/2" K | 14     | 38,0    | 23,0    | 33      | 17      | 19 |
| WR NW 06 HS 1/4 VA | S    | PN 400 | 10         | R 1/4" K | 12     | 34,0    | 17,5    | 28      | 17      | 22 |
| WR NW 06 HS VA     | S    | PN 400 | 10         | R 3/8" K | 12     | 34,0    | 17,5    | 28      | 17      | 22 |
| WR NW 06 HS 1/2 VA | S    | PN 400 | 10         | R 1/2" K | 14     | 39,0    | 22,5    | 32      | 17      | 22 |
| WR NW 08 HS 1/4 VA | S    | PN 400 | 12         | R 1/4" K | 12     | 38,0    | 21,5    | 27      | 17      | 24 |
| WR NW 08 HS VA     | S    | PN 400 | 12         | R 3/8" K | 12     | 38,0    | 21,5    | 28      | 17      | 24 |
| WR NW 08 HS 1/2 VA | S    | PN 400 | 12         | R 1/2" K | 14     | 40,0    | 23,5    | 34      | 19      | 24 |
| WR NW 10 HS 3/8 VA | S    | PN 400 | 14         | R 3/8" K | 12     | 40,0    | 22,0    | 30      | 19      | 27 |



### 货品

| 名称                 | 结构系列 | 工作压力 巴 | 管外径 Ø<br>(mm) | G        | i<br>(mm) | L3<br>(mm) | L4<br>(mm) | L5<br>(mm) | SW<br>(mm) | S3 |
|--------------------|------|--------|---------------|----------|-----------|------------|------------|------------|------------|----|
| WR NW 10 HS VA     | S    | PN 400 | 14            | R 1/2" K | 14        | 40,0       | 22,0       | 32         | 19         | 27 |
| WR NW 13 HS 3/8 VA | S    | PN 400 | 16            | R 3/8" K | 12        | 43,0       | 24,5       | 32         | 24         | 30 |
| WR NW 13 HS VA     | S    | PN 400 | 16            | R 1/2" K | 14        | 43,0       | 24,5       | 32         | 24         | 30 |
| WR NW 13 HS 3/4 VA | S    | PN 160 | 16            | R 3/4" K | 16        | 43,0       | 24,5       | 41         | 24         | 30 |
| WR NW 16 HS 1/2 VA | S    | PN 400 | 20            | R 1/2" K | 14        | 48,0       | 26,5       | 42         | 27         | 36 |
| WRK NW 16 HS VA    | S    | PN 160 | 20            | R 3/4" K | 16        | 48,0       | 26,5       | 42         | 27         | 36 |

结构系列:LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø = 管外径

### 产品变体

|         |                    |
|---------|--------------------|
| WRK     | 旋入式螺栓连接,角度90°, 钢   |
| WRK MG  | 旋入式螺栓连接,角度90°, 黄铜  |
| XWRK VA | 旋入式螺栓连接,角度90°, 不锈钢 |