


## 属性

|        |                |
|--------|----------------|
| 接口 1   | BSP外螺纹,圆柱形     |
| 密封形式 1 | O形圈和腔环         |
| 接口 2   | 米制外螺纹,圆柱形      |
| 密封形式 2 | 24°内锥          |
| 结构类型   | 旋入式螺栓连接,方向可调节  |
| 结构形式   | 角度90°          |
| 供货范围   | 接套(不带锁紧螺母和切割环) |
| 原料     | 钢              |
| 表面保护   | 电镀涂层           |

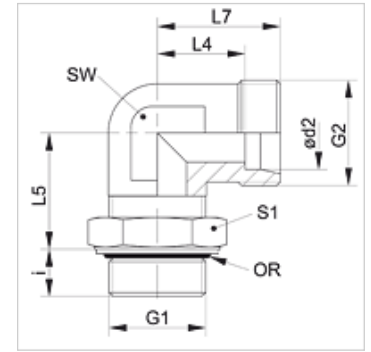

## 提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

## 货品

| 名称              | 结构系列 | 工作压力巴  | Ø d2<br>(mm) | G1           | G2         | i<br>(mm) | L4<br>(mm) | L5<br>(mm) | L7<br>(mm) | SW<br>(mm) | S1 | OR           |
|-----------------|------|--------|--------------|--------------|------------|-----------|------------|------------|------------|------------|----|--------------|
| XEWORK 04 LL    | LL   | PN 250 | 4            | G 1/8" -28   | M 8 x 1    | 7,1       | 11,3       | 20         | 15         | 11         | 14 | 7.65 x 1.78  |
| XEWORK 06 LL    | LL   | PN 250 | 6            | G 1/8" -28   | M 10 x 1   | 7,1       | 11,3       | 20         | 15         | 11         | 14 | 7.65 x 1.78  |
| XEWORK NW 04 HL | L    | PN 315 | 6            | G 1/8" -28   | M 12 x 1.5 | 7,0       | 14,0       | 19         | 21         | 14         | 14 | 7.65 x 1.78  |
| XEWORK NW 06 HL | L    | PN 315 | 8            | G 1/4" -19   | M 14 x 1.5 | 9,0       | 16,0       | 23         | 23         | 14         | 19 | 10.78 x 2.62 |
| XEWORK NW 08 HL | L    | PN 315 | 10           | G 1/4" -19   | M 16 x 1.5 | 9,0       | 17,0       | 25         | 24         | 19         | 19 | 10.77 x 2.62 |
| XEWORK NW 10 HL | L    | PN 250 | 12           | G 3/8" -19   | M 18 x 1.5 | 9,0       | 19,0       | 28         | 26         | 19         | 22 | 13.94 x 2.62 |
| XEWORK NW 13 HL | L    | PN 250 | 15           | G 1/2" -14   | M 22 x 1.5 | 13,0      | 21,0       | 30         | 28         | 22         | 27 | 17.86 x 2.62 |
| XEWORK NW 16 HL | L    | PN 250 | 18           | G 1/2" -14   | M 26 x 1.5 | 13,0      | 24,0       | 36         | 31         | 27         | 27 | 17.86 x 2.62 |
| XEWORK NW 20 HL | L    | PN 160 | 22           | G 3/4" -14   | M 30 x 2   | 13,0      | 28,0       | 36         | 35         | 30         | 36 | 23.47 x 2.62 |
| XEWORK NW 25 HL | L    | PN 160 | 28           | G 1" -11     | M 36 x 2   | 15,0      | 31,0       | 44         | 38         | 36         | 41 | 29.74 x 3.53 |
| XEWORK NW 32 HL | L    | PN 160 | 35           | G 1.1/4" -11 | M 45 x 2   | 15,0      | 38,0       | 50         | 48         | 50         | 50 | 37.69 x 3.53 |
| XEWORK NW 40 HL | L    | PN 160 | 42           | G 1.1/2" -11 | M 52 x 2   | 15,0      | 38,0       | 52         | 49         | 50         | 55 | 44.04 x 3.53 |
| XEWORK NW 03 HS | S    | PN 315 | 6            | G 1/4" -19   | M 14 x 1.5 | 9,0       | 15,0       | 23         | 22         | 14         | 19 | 10.77 x 2.62 |
| XEWORK NW 04 HS | S    | PN 315 | 8            | G 1/4" -19   | M 16 x 1.5 | 9,0       | 17,0       | 27         | 24         | 19         | 19 | 10.77 x 2.62 |
| XEWORK NW 06 HS | S    | PN 250 | 10           | G 3/8" -19   | M 18 x 1.5 | 9,0       | 18,0       | 29         | 25         | 19         | 22 | 13.94 x 2.62 |
| XEWORK NW 08 HS | S    | PN 250 | 12           | G 3/8" -19   | M 20 x 1.5 | 9,0       | 22,0       | 29         | 29         | 22         | 22 | 13.94 x 2.62 |
| XEWORK NW 10 HS | S    | PN 250 | 14           | G 1/2" -14   | M 22 x 1.5 | 13,0      | 25,0       | 36         | 33         | 27         | 27 | 18.00 x 3.00 |
| XEWORK NW 13 HS | S    | PN 250 | 16           | G 1/2" -14   | M 24 x 1.5 | 13,0      | 25,0       | 36         | 33         | 27         | 27 | 17.86 x 2.62 |
| XEWORK NW 16 HS | S    | PN 250 | 20           | G 3/4" -14   | M 30 x 2   | 12,0      | 28,0       | 39         | 38         | 30         | 36 | 23.47 x 2.62 |
| XEWORK NW 20 HS | S    | PN 250 | 25           | G 1" -11     | M 36 x 2   | 14,0      | 30,0       | 44         | 42         | 36         | 41 | 29.74 x 3.53 |
| XEWORK NW 25 HS | S    | PN 160 | 30           | G 1.1/4" -11 | M 42 x 2   | 15,0      | 36,0       | 49         | 49         | 50         | 50 | 37.69 x 3.53 |
| XEWORK NW 32 HS | S    | PN 160 | 38           | G 1.1/2" -11 | M 52 x 2   | 15,0      | 34,0       | 55         | 50         | 50         | 55 | 44.04 x 3.53 |

结构系列:LL=非常轻 L=轻 S=重 - PN = 额定压力 PB = 最大工作压力 - Ø d2 = 管外直径

## 产品变体

EWORX 旋入式螺栓连接,角度90°,带锁紧螺母和切割环的接套