


| | |
|-----------|------------------------|
| 属性 | |
| 接口 1 | 米制外螺纹,圆柱形 |
| 密封形式 1 | E型 |
| 接口 2 | 米制外螺纹,圆柱形 |
| 密封形式 2 | 24°内锥 |
| 结构类型 | 回转式螺栓连接,无节流 |
| 结构形式 | 角度90° |
| 标准 | DIN 2353 ISO 8434-1 |
| 供货范围 | 接套(不带锁紧螺母和切割环) |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

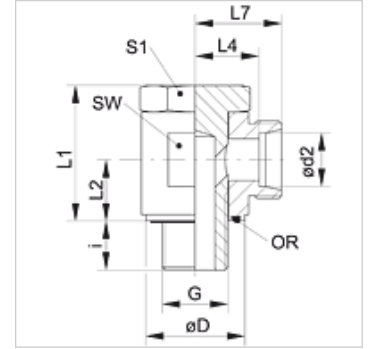

提示
有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

| 名称 | 结构系列 | 工作压力巴 | Ø d2 (mm) | G | Ø D (mm) | i (mm) | L1 (mm) | L2 (mm) | L4 (mm) | L7 (mm) | SW (mm) | S1 | OR |
|-------------------|------|--------|--------------|------------|-------------|-----------|------------|------------|------------|------------|------------|----|--------------|
| XSDOM 06 LL | LL | PN 100 | 6 | M 10 x 1 | 14,5 | 8,0 | 23,5 | 10,5 | 13,5 | 19,0 | 17 | 17 | 7.65 x 1.78 |
| XSDOM 08 LL | LL | PN 100 | 8 | M 10 x 1 | 14,5 | 8,0 | 23,5 | 10,5 | 13,5 | 19,0 | 17 | 17 | 7.65 x 1.78 |
| XSDOM NW 04 HL | L | PN 315 | 6 | M 10 x 1 | 14,0 | 8,0 | 24,0 | 10,5 | 12,0 | 19,0 | 17 | 17 | 7.65 x 1.78 |
| XSDOM NW 06 HL | L | PN 315 | 8 | M 12 x 1.5 | 17,0 | 12,0 | 30,0 | 14,0 | 14,5 | 21,5 | 22 | 19 | 11.10 x 1.78 |
| XSDOM NW 08 HL | L | PN 315 | 10 | M 14 x 1.5 | 19,0 | 12,0 | 30,0 | 14,0 | 15,5 | 22,5 | 22 | 19 | 11.10 x 1.78 |
| XSDOM NW 10 HL | L | PN 315 | 12 | M 16 x 1.5 | 21,0 | 12,0 | 36,0 | 16,5 | 18,0 | 25,0 | 27 | 24 | 14.00 x 1.78 |
| XSDOM NW 10 HL 18 | L | PN 315 | 12 | M 18 x 1.5 | 23,5 | 12,0 | 35,0 | 16,5 | 18,0 | 25,0 | 27 | 24 | 18.77 x 1.78 |
| XSDOM NW 13 HL | L | PN 315 | 15 | M 18 x 1.5 | 23,0 | 12,0 | 39,5 | 18,5 | 21,5 | 28,5 | 30 | 27 | 18.77 x 1.78 |
| XSDOM NW 16 HL | L | PN 315 | 18 | M 22 x 1.5 | 27,0 | 14,0 | 45,0 | 21,5 | 21,0 | 28,5 | 32 | 30 | 18.77 x 1.78 |
| XSDOM NW 20 HL | L | PN 160 | 22 | M 26 x 1.5 | 31,0 | 16,0 | 53,0 | 24,0 | 27,5 | 35,0 | 41 | 36 | 23.81 x 2.62 |
| XSDOM NW 25 HL | L | PN 160 | 28 | M 33 x 2 | 39,0 | 18,0 | 66,0 | 30,5 | 32,0 | 39,5 | 50 | 46 | 29.82 x 2.62 |
| XSDOM NW 32 HL | L | PN 160 | 35 | M 42 x 2 | 49,0 | 20,0 | 76,0 | 35,5 | 36,0 | 46,5 | 60 | 55 | 37.77 x 2.62 |
| XSDOM NW 40 HL | L | PN 160 | 42 | M 48 x 2 | 55,0 | 22,0 | 87,0 | 40,5 | 40,5 | 51,5 | 70 | 60 | 41.28 x 3.53 |
| XSDOM NW 03 HS | S | PN 400 | 6 | M 12 x 1.5 | 17,5 | 12,0 | 30,0 | 14,0 | 16,5 | 23,5 | 22 | 19 | 11.10 x 1.78 |
| XSDOM NW 04 HS | S | PN 400 | 8 | M 14 x 1.5 | 19,0 | 12,0 | 30,0 | 14,0 | 16,5 | 23,5 | 22 | 19 | 11.10 x 1.78 |
| XSDOM NW 06 HS | S | PN 400 | 10 | M 16 x 1.5 | 21,0 | 12,0 | 35,0 | 16,5 | 18,5 | 26,0 | 27 | 24 | 14.00 x 1.78 |
| XSDOM NW 08 HS | S | PN 400 | 12 | M 18 x 1.5 | 23,0 | 12,0 | 39,5 | 18,5 | 20,0 | 27,5 | 30 | 27 | 18.77 x 1.78 |
| XSDOM NW 10 HS | S | PN 400 | 14 | M 20 x 1.5 | 25,0 | 14,0 | 43,5 | 20,0 | 22,5 | 30,5 | 32 | 30 | 18.77 x 1.78 |
| XSDOM NW 13 HS | S | PN 315 | 16 | M 22 x 1.5 | 27,0 | 14,0 | 45,0 | 21,5 | 22,0 | 30,5 | 32 | 30 | 18.77 x 1.78 |
| XSDOM NW 16 HS | S | PN 315 | 20 | M 27 x 2 | 32,0 | 16,0 | 53,0 | 24,0 | 26,5 | 37,0 | 41 | 36 | 23.81 x 2.62 |
| XSDOM NW 20 HS | S | PN 250 | 25 | M 33 x 2 | 39,0 | 18,0 | 66,0 | 30,5 | 31,5 | 43,5 | 50 | 46 | 29.82 x 2.62 |
| XSDOM NW 25 HS | S | PN 160 | 30 | M 42 x 2 | 49,0 | 20,0 | 76,0 | 35,5 | 37,0 | 50,5 | 60 | 55 | 37.77 x 2.62 |
| XSDOM NW 32 HS | S | PN 160 | 38 | M 48 x 2 | 55,0 | 22,0 | 87,0 | 40,5 | 41,5 | 57,5 | 70 | 60 | 41.28 x 3.53 |

PN = 额定压力 PB = 最大工作压力 - 结构系列:LL=非常轻 L=轻 S=重 - Ø = 管外直径

| | |
|-------------|------------------------|
| 产品变体 | |
| XSDOM VA | 回转式螺栓连接,无节流,角度90°, 不锈钢 |
| SDOM | 回转式螺栓连接,无节流,角度90°, 钢 |