


### 属性

|        |                        |
|--------|------------------------|
| 接口 1   | BSP外螺纹,圆柱形             |
| 密封形式 1 | E型                     |
| 接口 2   | 米制外螺纹,圆柱形              |
| 密封形式 2 | 24°内锥                  |
| 结构类型   | 回转式螺栓连接,无节流            |
| 结构形式   | 角度90°                  |
| 标准     | DIN 2353<br>ISO 8434-1 |
| 供货范围   | 接套(不带锁紧螺母和切割环)         |
| 原料     | 钢                      |
| 表面保护   | 电镀涂层                   |

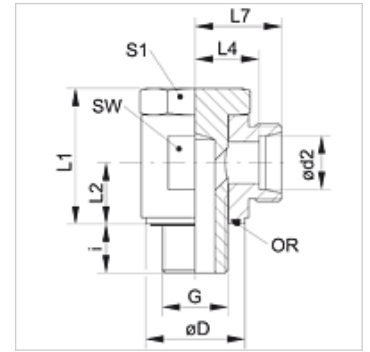

### 提示

有关安装、装入、压力负荷和允许的工作温度的说明请您参阅管螺栓连接的技术信息。

### 货品

| 名称                 | 结构系列 | 工作压力巴  | Ø d2<br>(mm) | G            | Ø D<br>(mm) | i<br>(mm) | L1<br>(mm) | L2<br>(mm) | L4<br>(mm) | L7<br>(mm) | SW<br>(mm) | S1 | OR           |
|--------------------|------|--------|--------------|--------------|-------------|-----------|------------|------------|------------|------------|------------|----|--------------|
| XSDOR 04 LL        | LL   | PN 100 | 4            | G 1/8" -28   | 14,5        | 8,0       | 23,5       | 10,5       | 14,0       | 18,0       | 17         | 17 | 7.65 x 1.78  |
| XSDOR 06 LL        | LL   | PN 100 | 6            | G 1/8" -28   | 14,5        | 8,0       | 23,5       | 10,5       | 13,5       | 19,0       | 17         | 17 | 7.65 x 1.78  |
| XSDOR 08 LL        | LL   | PN 100 | 8            | G 1/8" -28   | 14,5        | 8,0       | 23,5       | 10,5       | 13,5       | 19,0       | 17         | 17 | 7.65 x 1.78  |
| XSDOR NW 04 HL     | L    | PN 315 | 6            | G 1/8" -28   | 14,0        | 8,0       | 24,0       | 10,5       | 12,0       | 19,0       | 17         | 17 | 7.65 x 1.78  |
| XSDOR NW 06 HL     | L    | PN 315 | 8            | G 1/4" -19   | 18,0        | 12,0      | 30,0       | 14,0       | 14,5       | 21,5       | 22         | 19 | 11.10 x 1.78 |
| XSDOR NW 08 HL     | L    | PN 315 | 10           | G 1/4" -19   | 18,0        | 12,0      | 30,0       | 14,0       | 15,5       | 22,5       | 22         | 19 | 11.10 x 1.78 |
| XSDOR NW 10 HL 1/4 | L    | PN 315 | 12           | G 1/4" -19   | 19,0        | 12,0      | 34,0       | 16,5       | 18,0       | 25,0       | 27         | 19 | 11.10 x 1.78 |
| XSDOR NW 10 HL     | L    | PN 315 | 12           | G 3/8" -19   | 22,0        | 12,0      | 36,0       | 16,5       | 18,0       | 25,0       | 27         | 24 | 14.00 x 1.78 |
| XSDOR NW 10 HL 1/2 | L    | PN 315 | 12           | G 1/2" -14   | 27,0        | 14,0      | 46,0       | 21,5       | 20,5       | 27,5       | 32         | 27 | 18.77 x 1.78 |
| XSDOR NW 13 HL     | L    | PN 315 | 15           | G 1/2" -14   | 26,0        | 12,0      | 45,0       | 21,5       | 21,5       | 28,5       | 32         | 30 | 18.77 x 1.78 |
| XSDOR NW 16 HL     | L    | PN 315 | 18           | G 1/2" -14   | 26,0        | 14,0      | 45,0       | 21,5       | 21,0       | 28,5       | 32         | 30 | 18.77 x 1.78 |
| XSDOR NW 20 HL     | L    | PN 160 | 22           | G 3/4" -14   | 32,0        | 16,0      | 53,0       | 24,0       | 27,5       | 35,0       | 41         | 36 | 23.81 x 2.62 |
| XSDOR NW 25 HL     | L    | PN 160 | 28           | G 1" -11     | 39,0        | 18,0      | 66,0       | 30,5       | 32,0       | 39,5       | 50         | 46 | 29.82 x 2.62 |
| XSDOR NW 32 HL     | L    | PN 160 | 35           | G 1.1/4" -11 | 49,0        | 20,0      | 76,0       | 35,5       | 36,0       | 46,5       | 60         | 55 | 37.77 x 2.62 |
| XSDOR NW 40 HL     | L    | PN 160 | 42           | G 1.1/2" -11 | 55,0        | 22,0      | 87,0       | 40,5       | 40,5       | 51,5       | 70         | 60 | 41.28 x 3.53 |
| XSDOR NW 03 HS     | S    | PN 400 | 6            | G 1/4" -19   | 18,0        | 12,0      | 30,0       | 14,0       | 16,5       | 23,5       | 22         | 19 | 11.10 x 1.78 |
| XSDOR NW 04 HS     | S    | PN 400 | 8            | G 1/4" -19   | 18,0        | 12,0      | 30,0       | 14,0       | 16,5       | 23,5       | 22         | 19 | 11.10 x 1.78 |
| XSDOR NW 06 HS     | S    | PN 400 | 10           | G 3/8" -19   | 22,0        | 12,0      | 36,0       | 16,5       | 18,5       | 26,0       | 27         | 24 | 14.00 x 1.78 |
| XSDOR NW 08 HS     | S    | PN 400 | 12           | G 3/8" -19   | 22,0        | 12,0      | 36,0       | 16,5       | 18,5       | 26,0       | 27         | 24 | 14.00 x 1.78 |
| XSDOR NW 10 HS     | S    | PN 400 | 14           | G 1/2" -14   | 26,0        | 14,0      | 45,0       | 21,5       | 22,5       | 30,5       | 32         | 30 | 18.77 x 1.78 |
| XSDOR NW 13 HS     | S    | PN 315 | 16           | G 1/2" -14   | 26,0        | 14,0      | 45,0       | 21,5       | 22,0       | 30,5       | 32         | 30 | 18.77 x 1.78 |
| XSDOR NW 16 HS     | S    | PN 315 | 20           | G 3/4" -14   | 32,0        | 16,0      | 53,0       | 24,0       | 26,5       | 37,0       | 41         | 36 | 23.81 x 2.62 |
| XSDOR NW 20 HS     | S    | PN 250 | 25           | G 1" -11     | 39,0        | 18,0      | 66,0       | 30,5       | 31,5       | 43,5       | 50         | 46 | 29.82 x 2.62 |
| XSDOR NW 25 HS     | S    | PN 160 | 30           | G 1.1/4" -11 | 49,0        | 20,0      | 76,0       | 35,5       | 37,0       | 50,5       | 60         | 55 | 37.77 x 2.62 |
| XSDOR NW 32 HS     | S    | PN 160 | 38           | G 1.1/2" -11 | 55,0        | 22,0      | 87,0       | 40,5       | 41,5       | 57,5       | 70         | 60 | 41.28 x 3.53 |

PN = 额定压力 PB = 最大工作压力 - 结构系列:LL=非常轻 L=轻 S=重 - Ø = 管外直径

### 产品变体

|          |                        |
|----------|------------------------|
| XSDOR VA | 回转式螺栓连接,无节流,角度90°, 不锈钢 |
| SDOR     | 回转式螺栓连接,无节流,角度90°, 钢   |