

G HB IR L

旋上式接套

属性

接口 1 BSP外螺纹,圆柱形

密封形式 1 60°内锥

接口 2 BSP内螺纹,圆柱形


密封形式 2 扁平密封

结构类型 旋上式接套,长

结构形式 直道

原料 钢

表面保护 电镀涂层

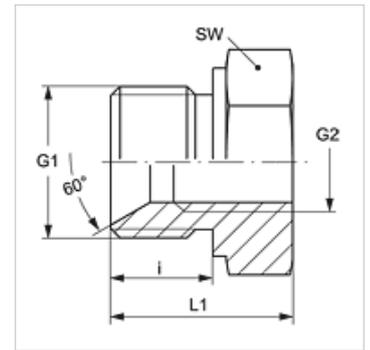

货品

名称	G1	G2	i (mm)	L1 (mm)	SW (mm)
G HB 06 IR 04 L	G 3/8" -19	G 1/4" -19	12,0	30,5	22
G HB 08 IR 06 L	G 1/2" -14	G 3/8" -19	16,0	38,0	30
G HB 16 IR 08 L	G 1" -11	G 1/2" -14	19,0	50,0	41
G HB 16 IR 12 L	G 1" -11	G 3/4" -14	20,5	47,5	41
G HB 20 IR 16 L	G 1.1/4" -11	G 1" -11	20,0	48,0	50
G HB 24 IR 20 L	G 1.1/2" -11	G 1.1/4" -11	22,0	54,5	55

SW = 对应边宽度