


ND AFL 90

插式内接头,DKL W90°

属性

| | |
|--------|--------------------------------|
| 接口 1 | 米制螺母螺纹 |
| 密封形式 1 | 24°/60° Universal sealing head |
| 缩略词 | DKL |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

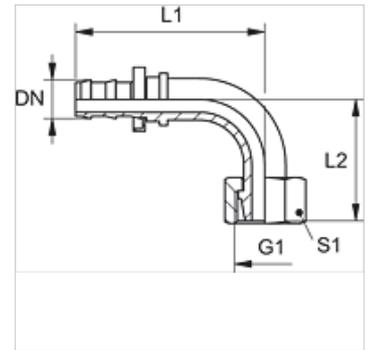

提示

未损坏的内接头可再次使用。

货品

| 名称 | DN | 尺寸 | 英寸 | G1 | 用于管外径-Ø (mm) | L1 (mm) | L2 (mm) | S1 |
|-----------------|----|----|------|------------|-----------------|------------|------------|----|
| ND 06 AFL 04 90 | 6 | 4 | 1/4" | M 12 x 1.5 | 6 | 42,0 | 29,0 | 14 |
| ND 06 AFL 90 | 6 | 4 | 1/4" | M 14 x 1.5 | 8 | 42,0 | 29,0 | 17 |
| ND 06 AFL 08 90 | 6 | 4 | 1/4" | M 16 x 1.5 | 10 | 42,0 | 29,0 | 19 |
| ND 10 AFL 08 90 | 10 | 6 | 3/8" | M 16 x 1.5 | 10 | 49,0 | 33,0 | 19 |
| ND 10 AFL 90 | 10 | 6 | 3/8" | M 18 x 1.5 | 12 | 49,0 | 34,0 | 22 |
| ND 13 AFL 90 | 12 | 8 | 1/2" | M 22 x 1.5 | 15 | 60,0 | 39,0 | 27 |
| ND 16 AFL 90 | 16 | 10 | 5/8" | M 26 x 1.5 | 18 | 74,0 | 43,0 | 32 |
| ND 20 AFL 90 | 19 | 12 | 3/4" | M 30 x 2 | 22 | 88,0 | 50,0 | 36 |
| ND 25 AFL 90 | 25 | 16 | 1" | M 36 x 2 | 28 | 99,0 | 70,0 | 41 |

附件

ND ASR GE, RO, BL 插式内接头用止挡圈