


# ND AJ

## 插式内接头,DKJ

### 属性

|        |            |
|--------|------------|
| 接口 1   | UN/UNF螺母螺纹 |
| 密封形式 1 | 74°内锥      |
| 缩略词    | DKJ        |
| 标准     | ISO 8434-2 |
| 原料     | 钢          |
| 表面保护   | 电镀涂层       |

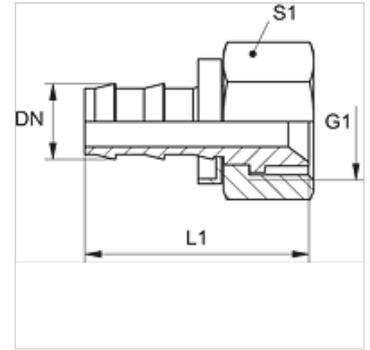

### 提示

未损坏的内接头可再次使用。

### 货品

| 名称          | DN | 尺寸 | 英寸   | G1                 | L1<br>(mm) | S1 |
|-------------|----|----|------|--------------------|------------|----|
| ND 06 AJ    | 6  | 4  | 1/4" | 7/16" -20 UNF      | 40,0       | 14 |
| ND 06 AJ 08 | 6  | 4  | 1/4" | 1/2" -20 UNF       | 40,0       | 17 |
| ND 10 AJ    | 10 | 6  | 3/8" | 9/16" -18 UNF      | 45,0       | 19 |
| ND 13 AJ    | 12 | 8  | 1/2" | 3/4" -16 UNF       | 51,0       | 22 |
| ND 13 AJ 16 | 12 | 8  | 1/2" | 7/8" -14 UNF(细牙系列) | 65,0       | 27 |
| ND 16 AJ    | 16 | 10 | 5/8" | 7/8" -14 UNF(细牙系列) | 65,0       | 27 |
| ND 20 AJ    | 19 | 12 | 3/4" | 1.1/16" -12 UN     | 67,0       | 32 |
| ND 25 AJ    | 25 | 16 | 1"   | 1.5/16" -12 UN     | 70,0       | 41 |

### 附件

ND ASR GE, RO, BL 插式内接头用止挡圈