

**属性**

接口 1   BSP外螺纹,圆柱形


密封形式 1   60°内锥

缩略词   AGR

标准   ISO 8434-6  
BS 5200

原料   钢

表面保护   电镀涂层

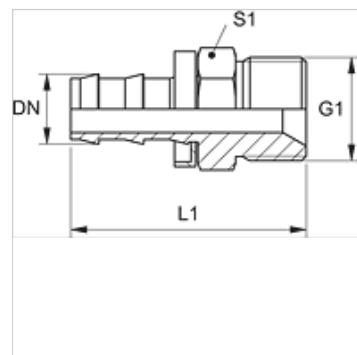

**提示**

未损坏的内接头可再次使用。

**货品**

名称	DN	尺寸	英寸	G1	L1 (mm)	S1
ND 06 HB 02	6	4	1/4"	G 1/8" -28	36,0	17
ND 06 HB	6	4	1/4"	G 1/4" -19	41,0	19
ND 10 HB 06	10	6	3/8"	G 1/4" -19	44,0	19
ND 10 HB	10	6	3/8"	G 3/8" -19	45,0	22
ND 13 HB	12	8	1/2"	G 1/2" -14	53,0	27
ND 16 HB 13	16	10	5/8"	G 1/2" -14	-	-
ND 16 HB	16	10	5/8"	G 5/8" -14	65,0	30
ND 20 HB	19	12	3/4"	G 3/4" -14	65,0	32

**附件**

ND ASR GE, RO, BL   插式内接头用止挡圈