

**属性**

接口 1 米制外螺纹,圆柱形

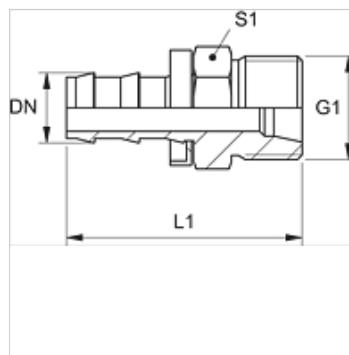
密封形式 1 24°内锥

缩略词 CEL

标准 ISO 8434-1

原料 钢

表面保护 电镀涂层

**提示**

未损坏的内接头可再次使用。

**货品**

名称	DN	尺寸	英寸	G1	用于管外径-Ø (mm)	L1 (mm)	S1
ND 06 HL 04	6	4	1/4"	M 12 x 1.5	6	35,0	12
ND 06 HL	6	4	1/4"	M 14 x 1.5	8	36,0	14
ND 10 HL 08	10	6	3/8"	M 16 x 1.5	10	41,5	17
ND 10 HL	10	6	3/8"	M 18 x 1.5	12	41,0	19
ND 13 HL	12	8	1/2"	M 22 x 1.5	15	49,0	22
ND 16 HL	16	10	3/8"	M 26 x 1.5	18	58,0	27
ND 20 HL	19	12	3/4"	M 30 x 2	22	63,0	30

**附件**

ND ASR GE, RO, BL 插式内接头用止挡圈