


属性

| | |
|--------|----------------|
| 接口 1 | NPT外螺纹 |
| 密封形式 1 | 螺纹密封,额外的60°内锥。 |
| 缩略词 | AGN |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

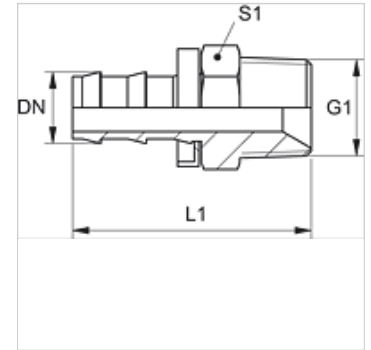

提示

未损坏的内接头可再次使用。

货品

| 名称 | DN | 尺寸 | 英寸 | G1 | L1 (mm) | S1 |
|-------------|----|----|------|--------------|------------|----|
| ND 06 HN 02 | 6 | 4 | 1/4" | 1/8" -27 NPT | 35,0 | 12 |
| ND 06 HN | 6 | 4 | 1/4" | 1/4" -18 NPT | 40,0 | 14 |
| ND 10 HN 06 | 10 | 6 | 3/8" | 1/4" -18 NPT | 45,0 | 14 |
| ND 10 HN | 10 | 6 | 3/8" | 3/8" -18 NPT | 45,0 | 22 |
| ND 10 HN 13 | 10 | 6 | 3/8" | 1/2" -14 NPT | 52,0 | 22 |
| ND 13 HN 10 | 12 | 8 | 1/2" | 3/8" -18 NPT | 49,0 | 22 |
| ND 13 HN | 12 | 8 | 1/2" | 1/2" -14 NPT | 55,0 | 22 |
| ND 16 HN 13 | 16 | 10 | 5/8" | 1/2" -14 NPT | 66,0 | 22 |
| ND 20 HN | 19 | 12 | 3/4" | 3/4" -14 NPT | 66,0 | 32 |

附件

ND ASR GE, RO, BL 插式内接头用止挡圈