


# PA 700 AOS

压力连接附件,DKOS

## 属性

应用范围	HD 700软管用压力连接附件
接口 1	米制螺母螺纹
密封形式 1	带O形圈的24°外锥
缩略词	DKOS
标准	ISO 8434-1
接入	带拉断保护(Interlock)
供货范围	压力内接头 + 压力卡套
原料	钢
表面保护	电镀涂层

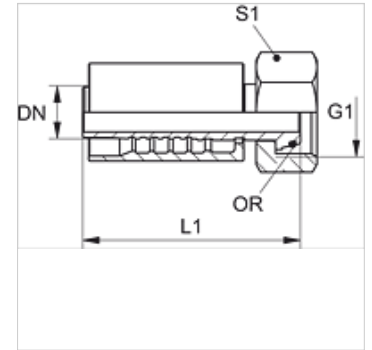

## 货品

名称	DN	尺寸	英寸	工作压力 (bar)	G1	用于管外径-Ø (mm)	S1	L1 (mm)	OR
PA 710 AOS 08	10	6	3/8"	630,0	M 20 x 1.5	-	24	-	10.0 x 1.5
PA 710 AOS	10	6	3/8"	630,0	M 22 x 1.5	14	27	67,6	12.0 x 2.0
PA 713 AOS	12	8	1/2"	420,0	M 24 x 1.5	16	30	72,8	13.0 x 2.0
PA 713 AOS 16	12	8	1/2"	420,0	M 30 x 2	20	36	75,8	17.5 x 2.5
PA 716 AOS 13	16	10	5/8"	420,0	M 24 x 1.5	16	30	83,5	13.0 x 2.0
PA 716 AOS	16	10	5/8"	420,0	M 30 x 2	20	36	86,0	17.5 x 2.5
PA 716 AOS 20	16	10	5/8"	420,0	M 36 x 2	25	41	89,0	20.0 x 2.5
PA 720 AOS 16	19	12	3/4"	420,0	M 30 x 2	20	36	96,0	16.0 x 2.5
PA 720 AOS	19	12	3/4"	420,0	M 36 x 2	25	46	99,0	20.0 x 2.5
PA 720 AOS SW41	19	12	3/4"	420,0	M 36 x 2	25	41	99,0	20.0 x 2.5
PA 720 AOS 25	19	12	3/4"	420,0	M 42 x 2	30	50	100,0	25.0 x 2.5
PA 725 AOS 20	25	16	1"	420,0	M 36 x 2	25	46	112,0	20.0 x 2.5
PA 725 AOS	25	16	1"	420,0	M 42 x 2	30	50	113,0	25.0 x 2.5
PA 725 AOS 32	25	16	1"	420,0	M 52 x 2	38	60	131,0	33.0 x 2.5
PA 732 AOS 25 S	31	20	1.1/4"	420,0	M 42 x 2	30	50	151,0	27.0 x 2.5
PA 732 AOS S	31	20	1.1/4"	420,0	M 52 x 2	38	60	112,5	33.0 x 2.5
PA 740 AOS 32	38	24	1.1/2"	420,0	M 52 x 2	38	60	136,5	33.0 x 2.5

## 产品变体

PA 700 AOS VA 压力连接附件,DKOS, 不锈钢