


PAY 300 HS

压力连接附件, CES

属性

| | |
|--------|--------------|
| 接口 1 | 米制外螺纹, 圆柱形 |
| 密封形式 1 | 24°内锥 |
| 缩略词 | CES |
| 标准 | ISO 8434-1 |
| 供货范围 | 压力内接头 + 压力卡套 |
| 原料 | 钢 |
| 表面保护 | 电镀涂层 |

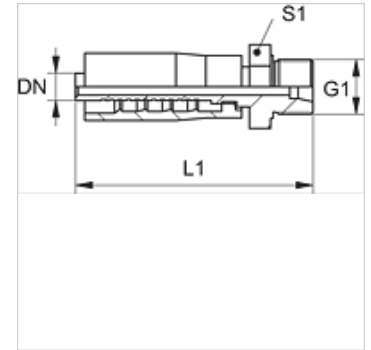

货品

| 名称 | DN | 尺寸 | 英寸 | G1 | 用于管外径-Ø (mm) | L1 (mm) | S1 |
|------------|----|----|-------|------------|-----------------|------------|----|
| PAY 306 HS | 6 | 4 | 1/4" | M 18 x 1.5 | 10 | 65,0 | 19 |
| PAY 308 HS | 8 | 5 | 5/16" | M 20 x 1.5 | 12 | 62,0 | 22 |
| PAY 310 HS | 10 | 6 | 3/8" | M 22 x 1.5 | 14 | 71,0 | 22 |
| PAY 313 HS | 12 | 8 | 1/2" | M 24 x 1.5 | 16 | 74,0 | 24 |
| PAY 316 HS | 16 | 10 | 5/8" | M 30 x 2 | 20 | 88,0 | 30 |
| PAY 320 HS | 19 | 12 | 3/4" | M 36 x 2 | 25 | 90,0 | 36 |
| PAY 325 HS | 25 | 16 | 1" | M 42 x 2 | 30 | 92,0 | 46 |