


# PAY 300 HS

压力连接附件, CES

**HANSA FLEX**

## 属性

接口 1	米制外螺纹, 圆柱形
密封形式 1	24°内锥
缩略词	CES
标准	ISO 8434-1
供货范围	压力内接头 + 压力卡套
原料	钢
表面保护	电镀涂层

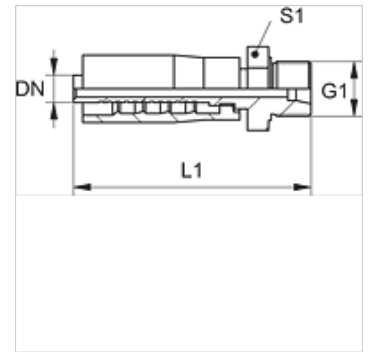

## 货品

名称	DN	尺寸	英寸	G1	用于管外径-Ø (mm)	L1 (mm)	S1
PAY 306 HS	6	4	1/4"	M 18 x 1.5	10	65,0	19
PAY 308 HS	8	5	5/16"	M 20 x 1.5	12	62,0	22
PAY 310 HS	10	6	3/8"	M 22 x 1.5	14	71,0	22
PAY 313 HS	12	8	1/2"	M 24 x 1.5	16	74,0	24
PAY 316 HS	16	10	5/8"	M 30 x 2	20	88,0	30
PAY 320 HS	19	12	3/4"	M 36 x 2	25	90,0	36
PAY 325 HS	25	16	1"	M 42 x 2	30	92,0	46