

# PN AFL 90 VA

压力内接头,DKL W90°

**HANSA FLEX**

## 属性

应用范围 用于HD 100至HD 400、KP、TE软管的压力内接头


接口 1 米制螺母螺纹

密封形式 1 24°/60° Universal sealing head

缩略词 DKL

结构系列 轻

原料 不锈钢

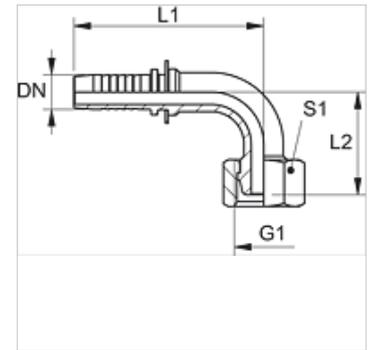

## 提示

请根据软管类型选择合适的卡套。

## 货品

名称	DN	尺寸	英寸	工作压力 (bar)	G1	用于管外径-Ø (mm)	L1 (mm)	L2 (mm)	S1
PN 06 AFL 04 90 VA	6	4	1/4"	250,0	M 12 x 1.5	6	58,8	30,5	14
PN 06 AFL 90 VA	6	4	1/4"	250,0	M 14 x 1.5	8	58,3	30,0	17
PN 08 AFL 90 VA	8	5	5/16"	250,0	M 16 x 1.5	10	62,3	35,0	19
PN 08 AFL 10 90 VA	8	5	5/16"	250,0	M 18 x 1.5	12	62,3	35,0	22
PN 10 AFL 90 VA	10	6	3/8"	250,0	M 18 x 1.5	12	64,3	35,0	22
PN 13 AFL 90 VA	12	8	1/2"	250,0	M 22 x 1.5	15	75,8	40,0	27
PN 16 AFL 90 VA	16	10	5/8"	160,0	M 26 x 1.5	18	89,0	49,0	32
PN 20 AFL 90 VA	19	12	3/4"	160,0	M 30 x 2	22	98,0	53,0	36
PN 25 AFL 90 VA	25	16	1"	100,0	M 36 x 2	28	122,5	67,5	41
PN 32 AFL 90 VA	31	20	1.1/4"	100,0	M 45 x 2	35	149,0	81,0	50
PN 40 AFL 90 VA	38	24	1.1/2"	100,0	M 52 x 2	42	166,0	100,0	60

## 产品变体

PN AFL 90