

# PN AFL 90 VA

压力内接头,DKL W90°

**HANSA FLEX**

## 属性

应用范围 用于HD 100至HD 400、KP、TE软管的压力内接头


接口 1 米制螺母螺纹

密封形式 1 24°/60° Universal sealing head

缩略词 DKL

结构系列 轻

原料 不锈钢

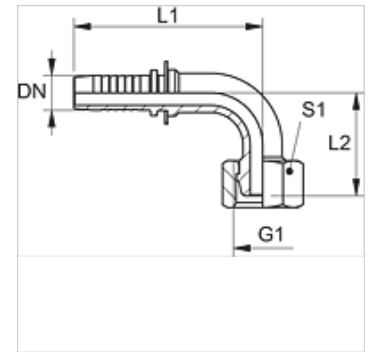

## 提示

请根据软管类型选择合适的卡套。

## 货品

| 名称                 | DN | 尺寸 | 英寸     | 工作压力<br>(bar) | G1         | 用于管外径-Ø<br>(mm) | L1<br>(mm) | L2<br>(mm) | S1 |
|--------------------|----|----|--------|---------------|------------|-----------------|------------|------------|----|
| PN 06 AFL 04 90 VA | 6  | 4  | 1/4"   | 250,0         | M 12 x 1.5 | 6               | 58,8       | 30,5       | 14 |
| PN 06 AFL 90 VA    | 6  | 4  | 1/4"   | 250,0         | M 14 x 1.5 | 8               | 58,3       | 30,0       | 17 |
| PN 08 AFL 90 VA    | 8  | 5  | 5/16"  | 250,0         | M 16 x 1.5 | 10              | 62,3       | 35,0       | 19 |
| PN 08 AFL 10 90 VA | 8  | 5  | 5/16"  | 250,0         | M 18 x 1.5 | 12              | 62,3       | 35,0       | 22 |
| PN 10 AFL 90 VA    | 10 | 6  | 3/8"   | 250,0         | M 18 x 1.5 | 12              | 64,3       | 35,0       | 22 |
| PN 13 AFL 90 VA    | 12 | 8  | 1/2"   | 250,0         | M 22 x 1.5 | 15              | 75,8       | 40,0       | 27 |
| PN 16 AFL 90 VA    | 16 | 10 | 5/8"   | 160,0         | M 26 x 1.5 | 18              | 89,0       | 49,0       | 32 |
| PN 20 AFL 90 VA    | 19 | 12 | 3/4"   | 160,0         | M 30 x 2   | 22              | 98,0       | 53,0       | 36 |
| PN 25 AFL 90 VA    | 25 | 16 | 1"     | 100,0         | M 36 x 2   | 28              | 122,5      | 67,5       | 41 |
| PN 32 AFL 90 VA    | 31 | 20 | 1.1/4" | 100,0         | M 45 x 2   | 35              | 149,0      | 81,0       | 50 |
| PN 40 AFL 90 VA    | 38 | 24 | 1.1/2" | 100,0         | M 52 x 2   | 42              | 166,0      | 100,0      | 60 |

## 产品变体

PN AFL 90