


# PN AOS 45 VA

压力内接头,DKOS W45°

## 属性

应用范围	用于HD 100至HD 400、KP、TE软管的压力内接头
接口 1	米制螺母螺纹
密封形式 1	带O形圈的24°外锥
缩略词	DKOS
标准	ISO 8434-1
结构系列	重
原料	不锈钢

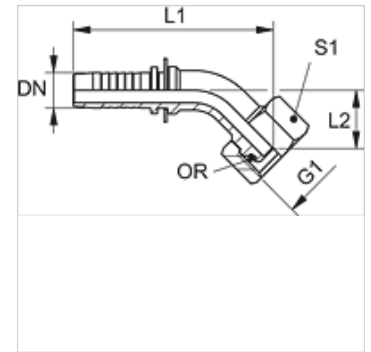

## 提示

请根据软管类型选择合适的卡套。

## 订购指南

NBR 材料制成的密封件  
FPM (氟胶) 应客户要求提供

## 货品

名称	DN	尺寸	英寸	G1	用于管外径-Ø (mm)	L1 (mm)	L2 (mm)	S1	OR
PN 06 AOS 03 45 VA	6	4	1/4"	M 14 x 1.5	6	66,8	15,0	17	4.0 x 1.5
PN 06 AOS 04 45 VA	6	4	1/4"	M 16 x 1.5	8	68,3	16,5	19	6.0 x 1.5
PN 06 AOS 45 VA	6	4	1/4"	M 18 x 1.5	10	68,3	16,5	22	7.5 x 1.5
PN 06 AOS 08 45 VA	6	4	1/4"	M 20 x 1.5	12	71,8	19,5	24	9.0 x 1.5
PN 08 AOS 04 45 VA	8	5	5/16"	M 16 x 1.5	8	74,3	19,0	19	6.0 x 1.5
PN 08 AOS 06 45 VA	8	5	5/16"	M 18 x 1.5	10	74,3	19,0	22	7.5 x 1.5
PN 08 AOS 45 VA	8	5	5/16"	M 20 x 1.5	12	74,3	19,0	24	9.0 x 1.5
PN 10 AOS 06 45 VA	10	6	3/8"	M 18 x 1.5	10	75,3	20,0	22	7.5 x 1.5
PN 10 AOS 08 45 VA	10	6	3/8"	M 20 x 1.5	12	73,3	18,5	24	9.0 x 1.5
PN 10 AOS 45 VA	10	6	3/8"	M 22 x 1.5	14	84,3	23,5	27	10.0 x 2.0
PN 10 AOS 13 45 VA	10	6	3/8"	M 24 x 1.5	16	85,3	24,0	30	12.0 x 2.0
PN 13 AOS 08 45 VA	12	8	1/2"	M 20 x 1.5	12	94,3	27,5	24	9.0 x 1.5
PN 13 AOS 45 VA	12	8	1/2"	M 24 x 1.5	16	88,8	25,0	30	12.0 x 2.0
PN 13 AOS 16 45 VA	12	8	1/2"	M 30 x 2	20	96,8	32,0	36	16.3 x 2.4
PN 16 AOS 45 VA	16	10	5/8"	M 30 x 2	20	103,0	28,0	36	16.3 x 2.4
PN 20 AOS 16 45 VA	19	12	3/4"	M 30 x 2	20	108,5	27,0	36	16.3 x 2.4
PN 20 AOS 45 VA	19	12	3/4"	M 36 x 2	25	120,0	37,0	46	20.3 x 2.4
PN 20 AOS 25 45 VA	19	12	3/4"	M 42 x 2	30	120,0	37,0	50	25.0 x 2.5
PN 25 AOS 20 45 VA	25	16	1"	M 36 x 2	25	140,5	39,0	46	20.3 x 2.4
PN 25 AOS 45 VA	25	16	1"	M 42 x 2	30	140,5	39,5	50	25.3 x 2.4
PN 25 AOS 32 45 VA	25	16	1"	M 52 x 2	38	140,5	39,5	60	33.3 x 2.4
PN 32 AOS 45 VA	31	20	1.1/4"	M 52 x 2	38	178,0	47,0	60	33.3 x 2.4

## 产品变体

PN AOS 45 压力内接头,DKOS W45°, 钢