


PN AR 90

压力内接头,DKR 扁平 W90°

HANSA FLEX

属性

应用范围	用于HD 100至HD 400、KP、TE软管的压力内接头
接口 1	BSP螺母螺纹
密封形式 1	扁平密封式
缩略词	DKR-扁平
原料	钢
表面保护	电镀涂层

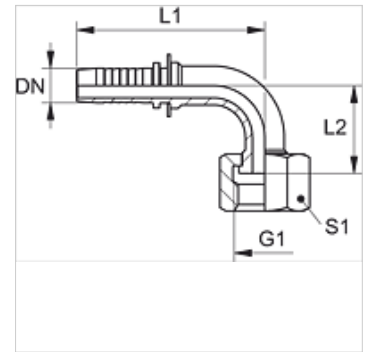

提示

请根据软管类型选择合适的卡套。

货品

名称	DN	尺寸	英寸	工作压力 (bar)	G1	L1 (mm)	L2 (mm)	S1
PN 06 AR 90	6	4	1/4"	350,0	G 1/4" -19	59,0	32,0	19
PN 10 AR 90	10	6	3/8"	350,0	G 3/8" -19	67,0	31,0	22
PN 10 AR 13 90	10	6	3/8"	315,0	G 1/2" -14	73,0	39,0	27
PN 13 AR 90	12	8	1/2"	315,0	G 1/2" -14	71,0	35,0	27
PN 13 AR 20 90	12	8	1/2"	250,0	G 3/4" -14	87,0	54,0	32
PN 16 AR 20 90	16	10	5/8"	250,0	G 3/4" -14	91,0	54,0	32
PN 20 AR 90	19	12	3/4"	250,0	G 3/4" -14	98,0	54,0	32
PN 20 AR 25 90	19	12	3/4"	200,0	G 1" -11	109,0	64,0	41
PN 25 AR 90	25	16	1"	200,0	G 1" -11	114,0	64,0	41
PN 32 AR 90	31	20	1.1/4"	160,0	G 1.1/4" -11	132,0	74,0	50

产品变体

PN AR 90 VA 压力内接头,DKR 扁平 W90°, 不锈钢