


PN AR 90 VA

压力内接头,DKR 扁平 W90°

属性

应用范围	用于HD 100至HD 400、KP、TE软管的压力内接头
接口 1	BSP螺母螺纹
密封形式 1	扁平密封式
缩略词	DKR-扁平
原料	不锈钢

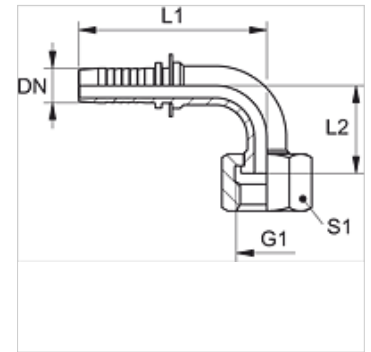

提示

请根据软管类型选择合适的卡套。

货品

名称	DN	尺寸	英寸	工作压力 (bar)	G1	L2 (mm)	S1
PN 06 AR 02 90 VA	6	4	1/4"	350,0	G 1/8" -28	17,0	14
PN 06 AR 90 VA	6	4	1/4"	350,0	G 1/4" -19	25,0	17
PN 08 AR 10 90 VA	8	5	5/16"	350,0	G 3/8" -19	30,0	19
PN 10 AR 13 90 VA	10	6	3/8"	315,0	G 1/2" -14	36,0	27
PN 10 AR 90 VA	10	6	3/8"	350,0	G 3/8" -19	30,0	19
PN 13 AR 20 90 VA	12	8	1/2"	250,0	G 3/4" -14	47,0	32
PN 13 AR 90 VA	12	8	1/2"	315,0	G 1/2" -14	36,5	27
PN 16 AR 20 90 VA	16	10	5/8"	250,0	G 3/4" -14	20,5	32
PN 16 AR 90 VA	16	10	5/8"	315,0	G 5/8" -14	50,0	27
PN 20 AR 25 90 VA	19	12	3/4"	200,0	G 1" -11	51,0	41
PN 20 AR 90 VA	19	12	3/4"	250,0	G 3/4" -14	50,0	32
PN 25 AR 32 90 VA	25	16	1"	160,0	G 1.1/4" -11	76,0	50
PN 25 AR 90 VA	25	16	1"	200,0	G 1" -11	64,5	41
PN 32 AR 40 90 VA	31	20	1.1/4"	125,0	G 1.1/2" -11	98,0	55
PN 32 AR 90 VA	31	20	1.1/4"	160,0	G 1.1/4" -11	74,5	50
PN 40 AR 90 VA	38	24	1.1/2"	125,0	G 1.1/2" -11	95,0	55
PN 50 AR 90 VA	51	32	2"	80,0	G 2" -11	119,0	70

产品变体

PN AR 90 压力内接头,DKR 扁平 W90°, 钢