

# T HMO HJ

## 旋入式接套,T形

### 属性

接口 1 米制外螺纹,圆柱形

密封形式 1 F型

接口 2 + 3 UN/UNF外螺纹


密封形式 2 + 3 74°外锥

结构类型 方向可调节的旋入式接套

结构形式 T形

原料 钢

表面保护 电镀涂层

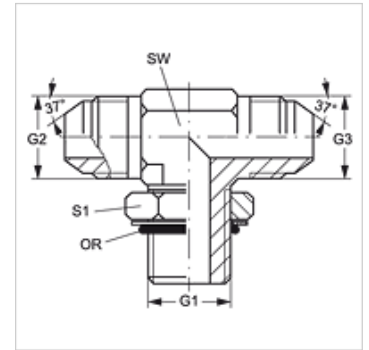

### 货品

名称	G1	G2 - G3	SW (mm)	S1	OR
T HMO 10 HJ 04	M 10 x 1	7/16" -20 UNF	11	14	8.2 x 1.5
T HMO 10 HJ 05	M 10 x 1	1/2" -20 UNF	13	14	8.2 x 1.5
T HMO 12 HJ 04	M 12 x 1.5	7/16" -20 UNF	13	17	9.4 x 2.1
T HMO 12 HJ 05	M 12 x 1.5	1/2" -20 UNF	13	17	9.4 x 2.1
T HMO 14 HJ 05	M 14 x 1.5	1/2" -20 UNF	14	17	11.3 x 2.4
T HMO 14 HJ 06	M 14 x 1.5	9/16" -18 UNF	14	19	11.3 x 2.4
T HMO 16 HJ 06	M 16 x 1.5	9/16" -18 UNF	19	22	13.4 x 2.1
T HMO 16 HJ 08	M 16 x 1.5	3/4" -16 UNF	19	22	13.4 x 2.1
T HMO 18 HJ 06	M 18 x 1.5	9/16" -18 UNF	22	19	15.4 x 2.1
T HMO 18 HJ 08	M 18 x 1.5	3/4" -16 UNF	19	24	15.4 x 2.1
T HMO 18 HJ 10	M 18 x 1.5	7/8" -14 UNF	22	24	15.4 x 2.1
T HMO 22 HJ 10	M 22 x 1.5	7/8" -14 UNF	22	27	19.4 x 2.1
T HMO 22 HJ 12	M 22 x 1.5	1.1/16" -12 UN	27	27	19.4 x 2.1
T HMO 27 HJ 12	M 27 x 2	1.1/16" -12 UN	27	32	23.7 x 2.8
T HMO 27 HJ 16	M 27 x 2	1.5/16" -12 UN	33	32	23.7 x 2.8
T HMO 33 HJ 16	M 33 x 2	1.5/16" -12 UN	33	41	29.7 x 2.8
T HMO 42 HJ 20	M 42 x 2	1.5/8" -12 UN	41	50	38.7 x 2.8
T HMO 48 HJ 24	M 48 x 2	1.7/8" -12 UN	48	55	46.7 x 2.8

SW, S1, S2 = 对应边宽度