


属性

| | |
|------------|--|
| 接口 1 - 3 | BSP内螺纹,圆柱形 |
| 密封形式 1 - 3 | A型 |
| 孔 | T形 |
| 开关路径 | 0°; 90° |
| 温度范围 | 水:0 °C 至 + 150 °C 空气:- 20 °C 至 + 150 °C |
| 原料 | 黄铜制壳体 铝制手柄 黄铜制球,硬镀铬 PTFE材料球形密封 |
| 表面保护 | 镀镍 |

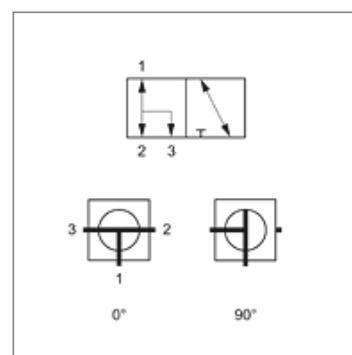

订购指南

其他压力值和温度值承索提供。

货品

| 名称 | DN* | 接口螺纹 | 工作压力 (bar) |
|---------------|-----|--------------|---------------|
| 3 BKR 06 ND T | 6 | 1/4" 螺纹 -19 | 25,0 |
| 3 BKR 10 ND T | 10 | G 3/8" -19 | 25,0 |
| 3 BKR 13 ND T | 12 | G 1/2" -14 | 25,0 |
| 3 BKR 20 ND T | 19 | G 3/4" -14 | 25,0 |
| 3 BKR 25 ND T | 25 | G 1" -11 | 25,0 |
| 3 BKR 32 ND T | 31 | G 1.1/4" -11 | 25,0 |
| 3 BKR 40 ND T | 38 | G 1.1/2" -11 | 25,0 |
| 3 BKR 50 ND T | 51 | G 2" -11 | 25,0 |

DN = 额定直径,额定宽度