


**属性**

|      |   |
|------|---|
| 结构类型 | 双管卡圈用                                   |
| 标准   | DIN 931 (ISO 4014) 或 DIN 933 (ISO 4017) |
| 原料   | 钢                                       |
| 表面保护 | 电镀涂层                                    |

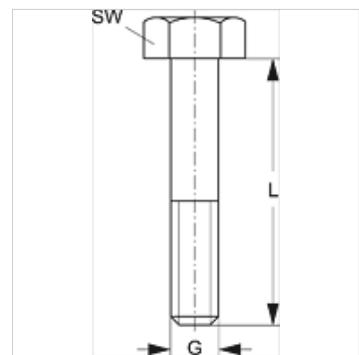

**货品**

| 名称         | 卡圈大小 | G   | L<br>(mm) | SW<br>(mm) |
|------------|------|-----|-----------|------------|
| SRS AS 1 D | 1    | M 6 | 35        | 10         |
| SRS AS 2 D | 2    | M 8 | 35        | 13         |
| SRS AS 3 D | 3    | M 8 | 45        | 13         |
| SRS AS 4 D | 4    | M 8 | 50        | 13         |
| SRS AS 5 D | 5    | M 8 | 60        | 13         |

**产品变体**

SRS AS D V4 双管卡圈用六角螺钉, 不锈钢 1.4571

**是以下产品的附加元件**

**B** B类组装