


HK CAT

用于柱塞缸的夹紧环

HANSA FLEX

属性

原料 钢 S355J0(Fe510C)

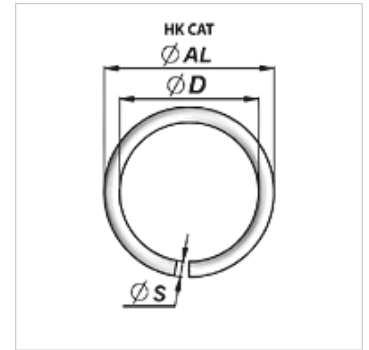

货品

| 名称 | $\varnothing AL$ (mm) | $\varnothing D$ (mm) | $\varnothing S$ (mm) | 重量 (kg) |
|-----------|--------------------------|-------------------------|-------------------------|------------|
| HK CAT 25 | 28 | 22,0 | 3 | 0,01 |
| HK CAT 30 | 33 | 27,0 | 3 | 0,01 |
| HK CAT 35 | 38 | 31,5 | 3 | 0,01 |
| HK CAT 40 | 44 | 36,0 | 4 | 0,01 |
| HK CAT 45 | 49 | 41,0 | 4 | 0,01 |
| HK CAT 50 | 54 | 45,5 | 4 | 0,09 |
| HK CAT 60 | 65 | 54,5 | 5 | 0,03 |