



|           |                  |
|-----------|------------------|
| <b>属性</b> |                  |
| 结构类型      | 刮刀               |
| 滑动速度 max. | 0,5 m/s          |
| 温度 min.   | -30 °C           |
| 温度 max.   | 110 °C           |
| 适用介质      | 矿物油<br>水-乳浊液     |
| 装配        | 将刮刀变成近圆形并压入支撑环槽内 |
| 应用        | 液压               |
| 原料        | NBR              |



| Toleranz / Tolerance |     |            |     |     |            |
|----------------------|-----|------------|-----|-----|------------|
| d                    | D   | L          | C   | F   | G          |
| h11                  | H11 | +0,20<br>0 | H10 | H11 | +0,20<br>0 |

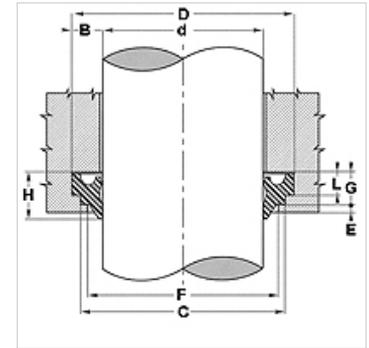

## 描述

简单的装配

## 货品

| 名称        | D<br>(mm) | d<br>(mm) | L<br>(mm) | C<br>(mm) | F<br>(mm) | G<br>(mm) | E<br>(mm) | H<br>(mm) |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| DSR 10-U  | 18        | 10        | 4,0       | 16        | 13,5      | 6,0       | 2         | 8         |
| DSR 12-U  | 20        | 12        | 4,0       | 18        | 15,5      | 6,0       | 2         | 8         |
| DSR 14-U  | 22        | 14        | 4,0       | 20        | 17,5      | 6,0       | 2         | 8         |
| DSR 15-U  | 23        | 15        | 4,0       | 21        | 18,5      | 6,0       | 2         | 8         |
| DSR 16-U  | 24        | 16        | 4,0       | 22        | 19,5      | 6,0       | 2         | 8         |
| DSR 18-U  | 26        | 18        | 4,0       | 24        | 21,5      | 6,0       | 2         | 8         |
| DSR 20-U  | 28        | 20        | 4,0       | 26        | 23,5      | 6,0       | 2         | 8         |
| DSR 22-U  | 30        | 22        | 4,0       | 28        | 25,5      | 6,0       | 2         | 8         |
| DSR 24-U  | 32        | 24        | 4,0       | 30        | 27,5      | 6,0       | 2         | 8         |
| DSR 25-U  | 33        | 25        | 4,0       | 31        | 28,5      | 6,0       | 2         | 8         |
| DSR 28-U  | 36        | 28        | 4,0       | 34        | 31,5      | 6,0       | 2         | 8         |
| DSR 30-U  | 38        | 30        | 4,0       | 36        | 33,5      | 6,0       | 2         | 8         |
| DSR 32-U  | 40        | 32        | 4,0       | 38        | 35,5      | 6,0       | 2         | 8         |
| DSR 35-U  | 43        | 35        | 4,0       | 41        | 38,5      | 6,0       | 2         | 8         |
| DSR 36-U  | 44        | 36        | 4,0       | 42        | 39,5      | 6,0       | 2         | 8         |
| DSR 37-U  | 45        | 37        | 4,0       | 43        | 40,5      | 6,0       | 2         | 8         |
| DSR 38-U  | 46        | 38        | 4,0       | 44        | 41,5      | 6,0       | 2         | 8         |
| DSR 40-U  | 48        | 40        | 4,0       | 46        | 43,5      | 6,0       | 2         | 8         |
| DSR 42-U  | 50        | 42        | 4,0       | 48        | 45,5      | 6,0       | 2         | 8         |
| DSR 45-U  | 53        | 45        | 4,0       | 51        | 48,5      | 6,0       | 2         | 8         |
| DSR 46-U  | 54        | 46        | 4,0       | 52        | 49,5      | 6,0       | 2         | 8         |
| DSR 48-U  | 56        | 48        | 4,0       | 54        | 51,5      | 6,0       | 2         | 8         |
| DSR 50-U  | 58        | 50        | 4,0       | 56        | 53,5      | 6,0       | 2         | 8         |
| DSR 55-U  | 63        | 55        | 4,0       | 61        | 58,5      | 6,0       | 2         | 8         |
| DSR 56-U  | 64        | 56        | 4,0       | 62        | 59,5      | 6,0       | 2         | 8         |
| DSR 60-U  | 68        | 60        | 4,0       | 66        | 63,5      | 6,0       | 2         | 8         |
| DSR 63-U  | 71        | 63        | 4,0       | 69        | 66,5      | 6,0       | 2         | 8         |
| DSR 65-U  | 73        | 65        | 4,0       | 71        | 68,5      | 6,0       | 2         | 8         |
| DSR 70-U  | 78        | 70        | 4,0       | 76        | 73,5      | 6,0       | 2         | 8         |
| DSR 75-U  | 83        | 75        | 4,0       | 81        | 78,5      | 6,0       | 2         | 8         |
| DSR 80-U  | 88        | 80        | 4,0       | 86        | 83,5      | 6,0       | 2         | 8         |
| DSR 85-U  | 93        | 85        | 4,0       | 91        | 88,5      | 6,0       | 2         | 8         |
| DSR 90-U  | 98        | 90        | 4,0       | 96        | 93,5      | 6,0       | 2         | 8         |
| DSR 100-U | 108       | 100       | 4,0       | 106       | 103,5     | 6,0       | 2         | 8         |
| DSR 110-U | 122       | 110       | 5,5       | 119       | 115,0     | 8,2       | 3         | 11        |
| DSR 125-U | 137       | 125       | 5,5       | 134       | 130,0     | 8,2       | 3         | 11        |
| DSR 130-U | 142       | 130       | 5,5       | 139       | 135,0     | 8,2       | 3         | 11        |
| DSR 140-U | 152       | 140       | 5,5       | 149       | 145,0     | 8,2       | 3         | 11        |
| DSR 145-U | 157       | 145       | 5,5       | 154       | 150,0     | 8,2       | 3         | 11        |
| DSR 150-U | 162       | 150       | 5,5       | 159       | 155,0     | 8,2       | 3         | 11        |
| DSR 160-U | 172       | 160       | 5,5       | 169       | 165,0     | 8,2       | 3         | 11        |
| DSR 200-U | 212       | 200       | 5,5       | 209       | 205,0     | 8,2       | 3         | 11        |
| DSR 220-U | 235       | 220       | 6,5       | 231       | 227,0     | 9,5       | 3         | 13        |
| DSR 360-U | 375       | 360       | 6,5       | 371       | 367,0     | 9,5       | 3         | 13        |