


PA 700 AOS

压力连接附件,DKOS

属性

应用范围	HD 400软管用压力连接附件
接口 1	米制螺母螺纹
密封形式 1	带O形圈的24°外锥
缩略词	DKOS
标准	ISO 8434-1
接入	带拉断保护(Interlock)
供货范围	压力内接头 + 压力卡套
原料	钢
表面保护	电镀涂层
结构系列	重

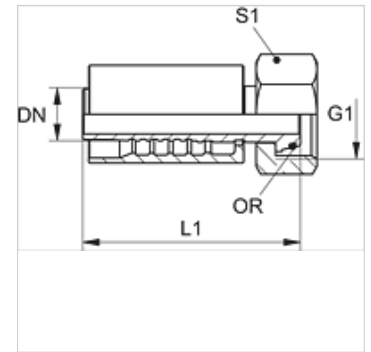

货品

名称	DN	尺寸	英寸	工作压力 (bar)	G1	用于管外径-Ø (mm)	L1 (mm)	S1	OR
PA 710 AOS 08	10	6	3/8"	630,0	M 20 x 1.5	12	-	24	10.0 x 1.5
PA 710 AOS	10	6	3/8"	630,0	M 22 x 1.5	14	67,6	27	12.0 x 2.0
PA 713 AOS	12	8	1/2"	420,0	M 24 x 1.5	16	72,8	30	13.0 x 2.0
PA 713 AOS 16	12	8	1/2"	420,0	M 30 x 2	20	75,8	36	17.5 x 2.5
PA 716 AOS 13	16	10	5/8"	420,0	M 24 x 1.5	16	83,5	30	13.0 x 2.0
PA 716 AOS	16	10	5/8"	420,0	M 30 x 2	20	86,0	36	17.5 x 2.5
PA 716 AOS 20	16	10	5/8"	420,0	M 36 x 2	25	89,0	46	20.0 x 2.5
PA 720 AOS 16	19	12	3/4"	420,0	M 30 x 2	20	96,0	36	17.5 x 2.5
PA 720 AOS	19	12	3/4"	420,0	M 36 x 2	25	99,0	46	20.0 x 2.5
PA 720 AOS 25	19	12	3/4"	420,0	M 42 x 2	30	100,0	50	27.0 x 2.5
PA 725 AOS 20	25	16	1"	420,0	M 36 x 2	25	112,0	46	22.0 x 2.5
PA 725 AOS	25	16	1"	420,0	M 42 x 2	30	113,0	50	25.0 x 2.5
PA 725 AOS 32	25	16	1"	420,0	M 52 x 2	38	131,0	60	33.0 x 2.5