

PA 700 AOS 90

压力连接附件,DKOS W90°

属性

应用范围 HD 400软管用压力连接附件

接口 1 米制螺母螺纹

密封形式 1 带O形圈的24°外锥

缩略词 DKOS

标准 ISO 8434-1


接入 带拉断保护(Interlock)

供货范围 压力内接头 + 压力卡套

原料 钢

表面保护 电镀涂层

结构系列 重

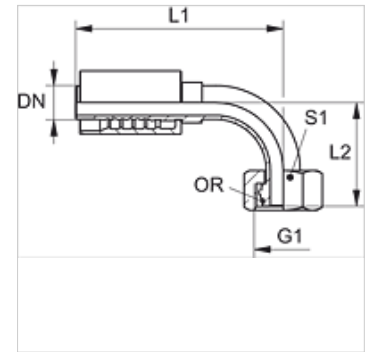

货品

名称	DN	尺寸	英寸	工作压力 (bar)	G1	用于管外径-Ø (mm)	L1 (mm)	S1	L2 (mm)	OR
PA 710 AOS 08 90	10	6	3/8"	630,0	M 20 x 1.5	12	-	24	-	10.0 x 1.5
PA 710 AOS 90	10	6	3/8"	630,0	M 22 x 1.5	14	71,7	27	-	12.0 x 2.0
PA 713 AOS 90	12	8	1/2"	420,0	M 24 x 1.5	16	87,0	30	45,0	13.0 x 2.0
PA 713 AOS 16 90	12	8	1/2"	420,0	M 30 x 2	20	86,5	36	49,5	17.5 x 2.5
PA 716 AOS 90	16	10	3/8"	420,0	M 30 x 2	20	106,5	36	49,5	17.5 x 2.5
PA 720 AOS 16 90	19	12	3/4"	420,0	M 30 x 2	20	125,5	36	57,5	17.5 x 2.5
PA 720 AOS 90	19	12	3/4"	420,0	M 36 x 2	25	125,5	46	62,0	20.0 x 2.5
PA 720 AOS 90 SW41	19	12	3/4"	420,0	M 36 x 2	25	125,5	41	62,0	20.0 x 2.5
PA 720 AOS 25 90	19	12	3/4"	420,0	M 42 x 2	30	129,0	50	71,5	25.0 x 2.5
PA 725 AOS 20 90	25	16	1"	420,0	M 36 x 2	25	144,0	46	71,0	20.0 x 2.5
PA 725 AOS 90	25	16	1"	420,0	M 42 x 2	30	157,5	50	72,5	25.0 x 2.5
PA 725 AOS 32 90	25	16	1"	420,0	M 52 x 2	38	154,5	60	84,5	33.0 x 2.5