

### 属性


结构类型 单管卡圈用

结构系列 重

标准 DIN 931 (ISO 4014) 或 DIN 933 (ISO 4017)

原料 钢

表面保护 电镀涂层

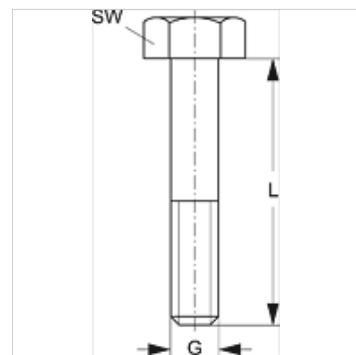

### 货品

| 名称         | 卡圈大小 | G    | L<br>(mm) | SW<br>(mm) |
|------------|------|------|-----------|------------|
| SRS AS 30  | 1    | M 10 | 40        | 17         |
| SRS AS 40  | 2    | M 10 | 60        | 17         |
| SRS AS 50  | 3    | M 10 | 70        | 17         |
| SRS AS 60  | 4    | M 12 | 100       | 19         |
| SRS AS 70  | 5    | M 16 | 130       | 24         |
| SRS AS 80  | 6    | M 20 | 190       | 30         |
| SRS AS 90  | 7    | M 24 | 220       | 36         |
| SRS AS 100 | 8    | M 30 | 300       | 46         |

### 产品变体

SRS AS 30-100 V4 单管卡圈用六角螺钉, 不锈钢 1.4571

### 是以下产品的附加元件

|     |         |
|-----|---------|
| C D | C类组装 双重 |
| C   | C类组装    |