


# HK DI 20

带手动卸载功能的安全和锁止块



属性	
结构类型	安全阀
工作压力	最大400巴
附加特性	带TÜV许可证
原料	Seal: VITON

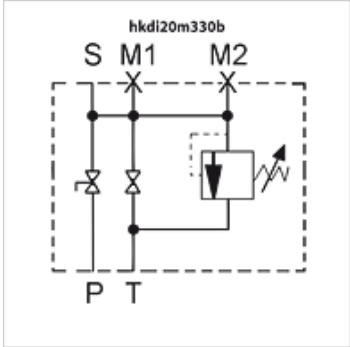

**提示**  
安全阀已固定调节好,在将其分配给相应的蓄能器时请注意最大压力!

**描述**  
The Safety Unit serves as a device for the protection, shut off and discharge of hydro accumulators. It is designed according to PED 2014/68/EU, article 3 paragraph 3, manufactured and considered to the European safety regulations for the operation of hydraulic accumulators. The discharge of the accumulator is manually by a ball valve or a relief valve.  
液体的粘度必须在以下范围内:  
最小10 mm2/s, 最大380 mm2/s

**订购指南**  
注意!用于相应蓄能器的适配器请另外订购。

名称	p max. (bar)	M1	M2	P	S	T	重量 (kg)
HK DI 20 M 330 B	330	1/2"	1/4"	1"	蓄能器接口 M 33x2	3/4"	6,8

pmax:安全阀已固定调节好, - 在将其分配给相应的蓄能器时请注意最大压力!

附件	
HK AS	安全和锁止块的蓄能器适配器
HK MSM	用于C型膜片式蓄能器的防松螺母