


属性

| | |
|--------------------|--|
| 接口 | 油接口:A + B = G 3/4"; 渗油 = G 1/4" |
| 规格 | Economy variant / short shaft always connect drain line Four hole flange bolt circle 160 轴Ø 40mm, 长60mm |
| 带渗油管道的入口和回流压力 max. | 210 bar |

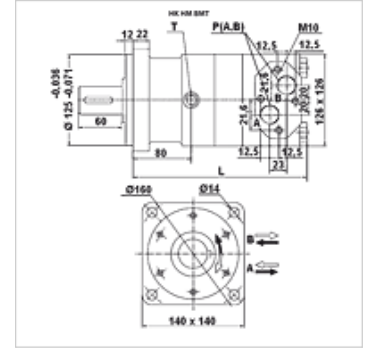

提示

建议连接漏油管线!

货品

| 名称 | 流量 max. (L/min) | 排量 (cc) | 转速 min. (rpm) | 转速 max. (rpm) | 扭矩 max. (N-m) | 压力落差 max. (bar) | Pmax. at 0-100 rpm (bar) | Pmax. at 100-300 rpm (bar) | Pmax. at 300 rpm (bar) | L (mm) | 重量 (kg) |
|---------------|--------------------|------------|------------------|------------------|------------------|--------------------|-----------------------------|-------------------------------|---------------------------|-----------|------------|
| HK HM BMT 160 | 100 | 158,8 | 10 | 625 | 450 | 200 | 75 | 40 | 20 | 210 | 20,3 |
| HK HM BMT 200 | 125 | 200,8 | 10 | 625 | 560 | 200 | 75 | 40 | 20 | 215 | 20,8 |
| HK HM BMT 250 | 125 | 252,2 | 10 | 500 | 710 | 200 | 75 | 40 | 20 | 220 | 21,4 |
| HK HM BMT 315 | 125 | 317,5 | 10 | 280 | 900 | 200 | 75 | 40 | 20 | 227 | 22,4 |
| HK HM BMT 400 | 125 | 401,6 | 10 | 305 | 1000 | 180 | 75 | 40 | 20 | 236 | 23,0 |
| HK HM BMT 500 | 125 | 535,5 | 10 | 240 | 1120 | 160 | 75 | 40 | - | 255 | 24,0 |

max. pressure on shaft seal (without leak oil line) or pressure in leak oil line - 扭矩和压力落差的数值适用于持续运行状态 - pmax.= 最大压力

附件

HK V0 590 冲击阀

备件

HK HM BM DS 用于CN液压行星马达的密封组件