


# K-INLINE-DRG AG IG O SEKUNDAERENTLU

Inline pressure regulators, non-self-relieving

**HANSA FLEX**

## 属性

工作压力	max. 18 bar
温度范围	0 °C to +60 °C
压力公差	± 0.3 bar at 10 l/min
壳体	Zinc
其余部件	Brass, NBR, stainless steel

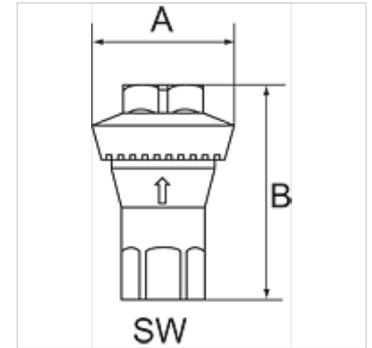

## 提示

其它数据应客户要求提供。

## 描述

This single-acting diaphragm regulator can be installed in any pneumatic system. Since the pressure is preset in the factory and cannot be altered, the product is also tamper-proof. We recommend mounting the regulator directly on the tool to make sure the correct pressure is applied. In this case, the tool is never stressed by the higher pressure of the supply system and is protected against pressure fluctuations in hoses, pipes, etc. Energy efficiency and economic efficiency can be achieved by using an inline pressure regulator.

## 货品

名称	螺纹	工作压力已预设	A (mm)	B	SW (mm)
K- 07 25 02 75	G 1/4	1 bar	34,0	52,0 mm	17
K- 07 25 02 76	G 1/4	2 bar	34,0	52,0 mm	17
K- 07 25 02 77	G 1/4	3 bar	34,0	52,0 mm	17
K- 07 25 02 78	G 1/4	4 bar	34,0	52,0 mm	17
K- 07 25 02 79	G 1/4	5 bar	34,0	52,0 mm	17
K- 07 25 02 80	G 1/4	6 bar	34,0	52,0 mm	17
K- 07 25 02 81	G 1/4	6,5 bar	34,0	52,0 mm	17
K- 07 25 02 82	G 1/4	7 bar	34,0	52,0 mm	17