


# K-DICHTRINGE PTFE

Sealing rings, PTFE (PTFE), max. temperature 260 °C

**HANSA FLEX**

## 属性

|    |              |
|----|--------------|
| 温度 | Max. +260 °C |
| 原料 | PTFE         |

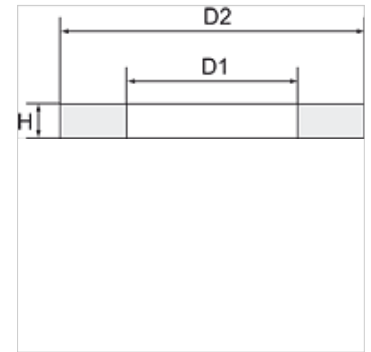

## 提示

其它数据应客户要求提供。

## 订购指南

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

## 货品

| 名称             | 用于螺纹  | D1<br>(mm) | D2<br>(mm) | H<br>(mm) |
|----------------|-------|------------|------------|-----------|
| K- 07 10 03 16 | M 5   | 5,1        | 8,0        | 1,0       |
| K- 07 10 03 20 | G 1/2 | 21,0       | 28,0       | 1,5       |
| K- 07 10 03 18 | G 1/4 | 13,2       | 18,0       | 1,5       |
| K- 07 10 03 19 | G 3/8 | 16,8       | 22,0       | 1,5       |
| K- 07 10 03 22 | G 1   | 33,3       | 38,9       | 2,0       |
| K- 07 10 03 21 | G 3/4 | 26,5       | 33,0       | 2,0       |
| K- 07 10 03 17 | G 1/8 | 10,0       | 13,0       | 1,5       |