
K-SCHL-AUFROLLER LU WA L

Hose reels for compressed air and water, lightweight type

属性

软管材料	PVC
工作压力	max. 12 bar (K-07100622); max. 20 bar (K-07100623)
工作温度	max. +60 °C
输入端接套	G 1/4
转动角度	180°



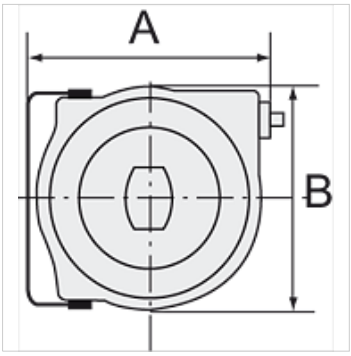

提示

其它数据应客户要求提供。

描述

High-quality, impact-resistant polypropylene housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or stop function. Reel guide prevents excessive wear on the hose.

货品

名称	软管尺寸	A (mm)	B (mm)	软管长度 (m)
K- 07 10 06 22	12 mm x 8 mm	340,0	311,0	8
K- 07 10 06 23	12 mm x 6 mm	445,0	400,0	15

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。