

K-SCHL-AUFROLLER LUFT H

Hose reels for compressed air, high flow capacity

HANSA**FLEX**


属性

软管材料 Braided polyurethane

工作压力 最大12巴

工作温度 -20 °C to +60 °C

转动角度 300°

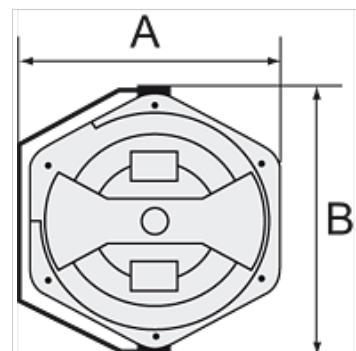

提示

其它数据应客户要求提供。

描述

Specially designed to ensure a high flow capacity. Easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose.

货品

名称	软管尺寸	A (mm)	B (mm)	软管长度 (m)
K-07 10 06 14	16 mm x 11 mm	394,5	436,0	10