
K-SPIR SCHL KUPPL SET

Spiral hose and coupling kits

属性

工作压力	max. 10 bar (to the temperature +20 °C); max. 7 bar (at temperature +40 °C); max. 5 bar (at temperature +60 °C)
接合器	High quality hand quick release coupling of steel for high flow rates For demanding applications with high mechanical wear
螺旋线状橡皮管	Polyurethane

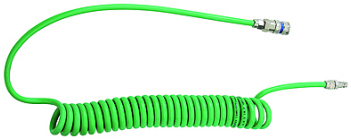

提示

其它数据应客户要求提供。

描述

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

货品

名称	软管尺寸	螺旋管直径 Ø (mm)	工作长度 (m)
K- 07 10 07 56	10 mm x 6,5 mm	52	4,0
K- 07 10 07 57	10 mm x 6,5 mm	52	6,0
K- 07 10 07 58	12 mm x 8 mm	65	8,0

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。